

N32H474xC/xE

Product Brief

N32H474 series adopts a 32-bit ARM Cortex-M4F core, with a maximum operating frequency of 240MHz, supporting floating-point unit and DSP instructions. It integrates up to 512-KB embedded flash, 192-KB SRAM (including 32-KB CCM SRAM), and 4-KB Backup SRAM. It also integrates 4x 12bit 4.7Msps ADCs, 8x 12bit DAC, 4x PGA, 7x COMP, USB FS Device, U(S)ART, I2C, SPI, CAN-FD, Ethernet, and other communication interfaces. It supports FEMC, xSPI high-speed storage interfaces, I2S audio interface, super high-resolution timer, multiple advanced control timers, general timers, basic timers, low-power timers. It also features a built-in hardware acceleration engine for cryptographic algorithms, supporting AES/TDES, SHA, SM3, SM4, MD5 algorithms, TRNG true random number generator, and CRC16/32.

Key features

● CPU Core

- 32-bit ARM Cortex-M4F + FPU, single-cycle hardware multiplication and division instruction, support DSP instruction and MPU
- Built-in 8-KB instruction Cache supporting Flash acceleration unit for zero-wait program execution
- Frequency up to 200 MHz, 300 DMIPS

● Memories

- 512-KByte of embedded Flash memory with ECC
 - ◆ Supports encryption, multi-user partition and data protection
 - ◆ 100,000 erase/write cycles and 10-years data retention
- 160-KByte of general SRAM with hardware parity checking
- 32-KByte of CCM SRAM with ECC, defaults to general SRAM after power-up, configurable as CCM SRAM
- 4-KByte of Backup SRAM with ECC available in Standby mode

● Power Modes

- Run mode: 45 mA/MHz@240 MHz (peripherals off, 3.3 V@25°C)
- Stop0 mode: SRAM and all registers can be configured to retention, RTC run
- Standby mode: typical value 6uA, all backup registers and Backup SRAM retained, all IOs retained, optional RTC run

● Clock

- HSE: 4MHz~32MHz high-speed external crystal oscillator
- LSE: 32.768KHz low-speed external crystal oscillator
- Built-in multiple high speed PLLs

- MCO: Supports 2-channel clock outputs, which can be configured independently as clock output
- HSI: High-speed internal RC 8MHz, with an accuracy of -1.5% to +2% across the full temperature range.
- LSI: Low-speed internal RC 32KHz, with an accuracy of +/-10% across the full temperature range.
- **Reset**
 - Supports power-on/brown-out/external pin reset
 - Supports watchdog reset
 - Supports programmable voltage detection
- **GPIOs**
 - Up to 107 GPIOs
- **Communication Interfaces**
 - 1x USB2.0 FS Device interface, built-in PHY, supports crystal-less mode
 - 6x SPI interfaces, 2x I2S interfaces, support half/full duplex mode, multiplexed with SPI interfaces
 - U(S)ART interfaces
 - ◆ 4x USART interfaces (support ISO7816, IrDA, LIN)
 - ◆ 4x UART interfaces
 - ◆ TX/RX of USART3/USART5/USART8 can be mapped to all pins
 - 4x I2C interfaces(Master/Slave) with speed up to 1 MHz where slave mode support dual address response
 - 3x CAN-FD bus interface, TX/RX can be mapped to all pins
- **High Performance Analog Interfaces**
 - 4x 12bit ADCs with 4.7Msps
 - ◆ Multiple precision configuration, support 12-bit, 10-bit, 8-bit, 6-bit sampling precision, resolution up to 16-bit with hardware oversample
 - ◆ Up to 16 external single-ended input channels, 3 internal single-ended input channels, support differential mode and single-ended mode
 - 8x 12bit DAC
 - ◆ DAC1~4: Support 1 internal output channel and 1 external output channel, with a sampling rate of 1Msps. Support output channel buffered/unbuffered modes.
 - ◆ DAC5~8: Support 1 internal output channel and 1 external output channel, with a sampling rate of 15Msps. Only support output channel buffered/unbuffered modes.
 - 4x rail-to-rail PGAs, support differential mode and single-ended mode
 - 7x high-speed comparators (COMP)
 - Supports 1 reference voltage VREFBUF (2.048V/2.5V/2.9V configurable)
 - 1x temperature sensor

- **High Speed External Memory Interfaces**

- 1x xSPI interface, supporting external SRAM, PSRAM and Flash, supporting XIP
- 1x FEMC (Flexible External Memory Controller) interface, supporting external SRAM, PSRAM, NOR Flash and NAND Flash, 8/16-bit data bus width configurable

- **CORDIC Mathematical hardware accelerator for motor control functions**

- **Built-in filter mathematical accelerator FMAC, supporting FIR, IIR filtering**

- **DMA Controllers**

- 2x DMA controller
- Each controller supports 8 channels
- Channel source address and destination address can be configured arbitrarily

- **RTC real-time clock**

- Supports leap-year calendar, alarm event, periodic wake up
- Supports internal and external clock calibration

- **Timers**

- 1x 16bit super high-resolution timer (SHRTIM1)
 - ◆ Supports 6x 16-bit timer units, each timer unit has 2 independent channels, with a maximum control precision of 125ps.
 - ◆ Supports 12 independent PWM outputs or 6 pairs of complementary PWM outputs.
- 3x 16-bit advanced control timers with maximum control precision of 5 ns
 - ◆ Support input capture, complementary output, quadrature encoder input etc.
 - ◆ Each has 6 independent channels, 4 of which support 4 pairs of complementary PWM output.
- 10x 16-bit general purpose timers (GTIM1~10)
 - ◆ GTIM1~7, with a maximum control precision of 5.56ns, each timer has up to 4 independent channels, each channel supports input capture, output comparison, PWM generation, and single-pulse mode output.
 - ◆ GTIM8~10, with a maximum control precision of 5ns, each timer has up to 4 independent channels, each channel supports input capture, output comparison, PWM generation, and single-pulse mode output, only channel 1 supports complementary output with dead time, supports break input.
- 2x 32-bit basic timers
- 2x 16-bit low-power timer, can operate in Stop0 and Standby mode.
- 1x 24-bit SysTick timer.
- 1x 14-bit Window Watchdog (WWDG)
- 1x 12-bit Independent Watchdog (IWDG)

- **Programming Methods**

- Support SWD/JTAG debugging interface.
- Support UART and USB Bootloader

- **Security Features**

- Flash encryption, multi-user partition management unit (SMPU)
- Supports write protection (WRP), multiple read protection (RDP) levels (L0/L1/L2)
- Built-in hardware acceleration engine for cryptographic algorithm
- Supports AES/TDES, SHA, SM3, SM4, and MD5 algorithms
- True random number generator(TRNG)
- CRC16/32 operation
- Supports secure boot, program encryption download, secure firmware update
- Supports external clock failure detection, anti-tamper detection.

- **96-bit UID and 128-bit UCID**

- **Operating Conditions**

- Operating voltage range: 1.8V~3.6V
- Operating temperature range: -40°C ~ 105°C/125°C
- ESD: ± 4 KV (HBM model), ± 1 KV (CDM model)
- EFT: EFT: VDD (+/-4KV, level A), I/O (+/-2KV, level A)

- **Packages**

- QFN32(5mm x 5mm)
- UQFN48(7mm x 7mm)
- LQFP48(7mm x 7mm)
- LQFP64(10mm x 10mm)
- LQFP80(12mm x 12mm)
- LQFP100(14mm x 14mm)
- LQFP128(14mm x 14mm)

1 Ordering Information

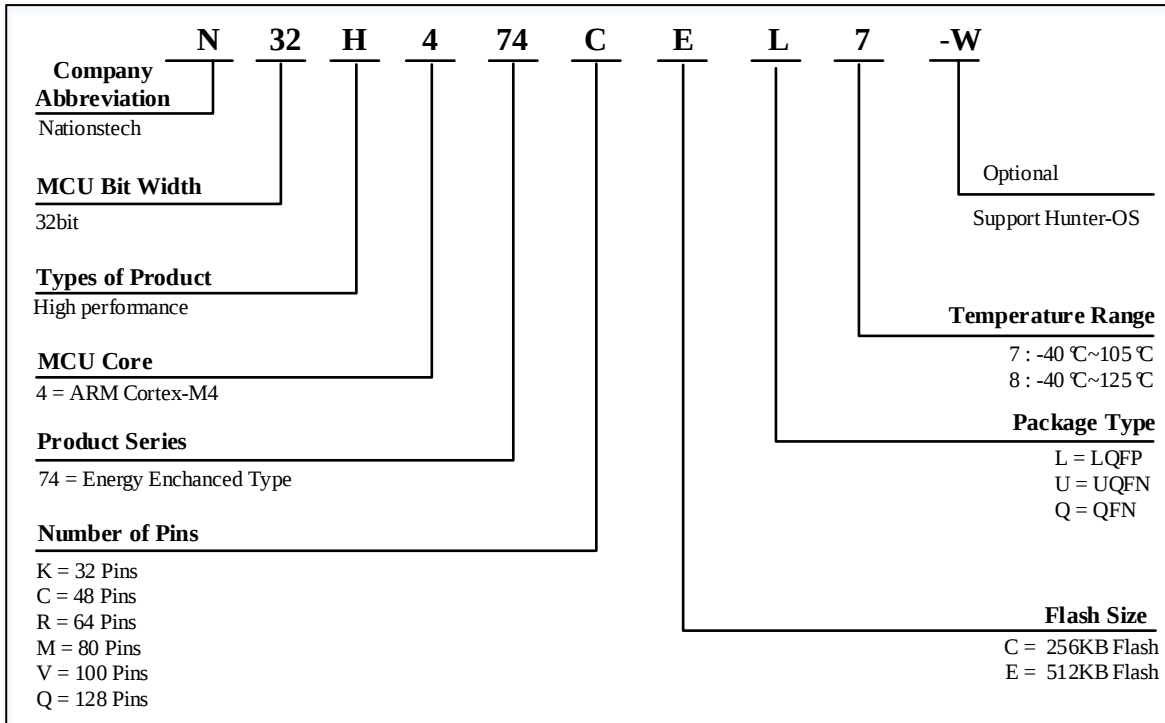


Table 1-1 N32H474 Series Ordering Code

Ordering Code ⁽¹⁾	Package	Size	Packaging ⁽²⁾	SPQ ⁽³⁾	Temperature range
N32H474KCQ7	QFN32	5mm x 5mm	Tray	490	-40°C ~ 105°C
N32H474CCU7	UQFN48	7mm x 7mm	Tray	260	-40°C ~ 105°C
N32H474CCL7	LQFP48	7mm x 7mm	Tray	250	-40°C ~ 105°C
N32H474RCL7	LQFP64	10mm x 10mm	Tray	160	-40°C ~ 105°C
N32H474MCL7	LQFP80	12mm x 12mm	Tray	119	-40°C ~ 105°C
N32H474VCL7	LQFP100	14mm x 14mm	Tray	90	-40°C ~ 105°C
N32H474QCL7	LQFP128	14mm x 14mm	Tray	90	-40°C ~ 105°C
N32H474KEQ7	QFN32	5mm x 5mm	Tray	490	-40°C ~ 105°C
N32H474CEU7	UQFN48	7mm x 7mm	Tray	260	-40°C ~ 105°C
N32H474CEL7	LQFP48	7mm x 7mm	Tray	250	-40°C ~ 105°C
N32H474REL7	LQFP64	10mm x 10mm	Tray	160	-40°C ~ 105°C
N32H474MEL7	LQFP80	12mm x 12mm	Tray	119	-40°C ~ 105°C
N32H474VEL7	LQFP100	14mm x 14mm	Tray	90	-40°C ~ 105°C
N32H474QEL7	LQFP128	14mm x 14mm	Tray	90	-40°C ~ 105°C
N32H474VEL7-W	LQFP100	14mm x 14mm	Tray	90	-40°C ~ 105°C
N32H474KCQ8	QFN32	5mm x 5mm	Tray	490	-40°C ~ 125°C

N32H474CCU8	UQFN48	7mm x 7mm	Tray	260	-40°C~125°C
N32H474RCL8	LQFP64	10mm x 10mm	Tray	160	-40°C~125°C
N32H474MCL8	LQFP80	12mm x 12mm	Tray	119	-40°C~125°C
N32H474VCL8	LQFP100	14mm x 14mm	Tray	90	-40°C~125°C
N32H474QCL8	LQFP128	14mm x 14mm	Tray	90	-40°C~125°C
N32H474KEQ8	QFN32	5mm x 5mm	Tray	490	-40°C~125°C
N32H474CEU8	UQFN48	7mm x 7mm	Tray	260	-40°C~125°C
N32H474REL8	LQFP64	10mm x 10mm	Tray	160	-40°C~125°C
N32H474MEL8	LQFP80	12mm x 12mm	Tray	119	-40°C~125°C
N32H474VEL8	LQFP100	14mm x 14mm	Tray	90	-40°C~125°C
N32H474QEL8	LQFP128	14mm x 14mm	Tray	90	-40°C~125°C

1. For the latest detailed-ordering information, please refer to the Selection Guide.
2. The packaging provided is the basic packaging. If user has any other requirements, please contact Naitons.
3. Minimum packaging quantity.

2 Product Configurations

Table 2-1 N32H474 Series Product Configuration

Device		N32H474KCQ7/8 N32H474KEQ7/8		N32H474CCU7/8 N32H474CEU7/8		N32H474CCL7 N32H474CEL7		N32H474RCL7/8 N32H474REL7/8		N32H474MCL7/8 N32H474MEL7/8		N32H474VCL7/8 N32H474VEL7/8 N32H474VEL7-W		N32H474QCL7/8 N32H474QEL7/8	
Operating Condition		1.8~3.6V/-40~105°C /125°C													
CPU Frequency		ARM Cortex-M4F @240MHz, 105°C, 300DMIPS ARM Cortex-M4F @200MHz, 125°C, 250DMIPS													
Flash Capacity (KB)		256	512	256	512	256	512	256	512	256	512	256	512	256	512
Total SRAM (KB)	General SRAM	112	160	112	160	112	160	112	160	112	160	112	160	112	160
	CCM SRAM ⁽¹⁾	32													
	Backup SRAM	4													
Times	SHRTIM	1*16bit ⁽²⁾						1*16bit							
	ATIM	3*16bit						3*16bit							
	GTIM	7*16bit 3*16bit						7*16bit 3*16bit				7*16bit 3*16bit			
	BTIM	2*32bit													
	LPTIM	2*16bit													
	SysTick timer	1													
	WWDG	1*14bit													
	IWDG	1*12bit													
	RTC	Yes													
Communication Interfaces	SPI/I2S	4/2		5/2						6/2					
	I ² C	4													
	USART	4													
	UART	4													
	USB FS Device	Yes													
	FDCAN	3													

Memory Expansion	XSPI	Yes ⁽³⁾			Yes			
	FEMC	No					Yes ⁽⁴⁾	Yes
GPIO		26	42	38	52	66	86	107
WKUP Pins		2	3	3	4	4	5	5
DMA		2						
Number of channels		16Channel						
12bit ADC		4	4	4	4	4	4	4
Number of channels		13Channel	21Channel	20Channel	26Channel	38Channel	45Channel	51Channel
12bit DAC		8						
Number of channels		8 (4 External/Internal + 4 Internal)						
PGA		4						
COMP		7						
VREFBUF		No	Yes					
Algorithm Support		DES/3DES、AES、SHA1/SHA224/SHA256、SM3、SM4、MD5、CRC16/CRC32						
TRNG		Yes						
Cordic		Yes						
FMAC		Yes						
Security Protection		Read-write protection (RDP/WRP), storage encryption, partition protection, secure boot						
Package		QFN32	UQFN48	LQFP48	LQFP64	LQFP80	LQFP100	LQFP128

Notes:

(1) CCM SRAM is powered up as general SRAM by default, and users can configure it as CCM SRAM.

(2) SHRTIM in the two packaging forms UQFN48 and LQFP48 only supports 4 timing units A~D, QFN32 only supports 2 timing units A/B


(3) XSPI does not support 8-wire mode.

(4) FMEC only supports address bus and data bus multiplexing


3 Package

3.1 QFN32

3.1.1 QFN32 Pinout

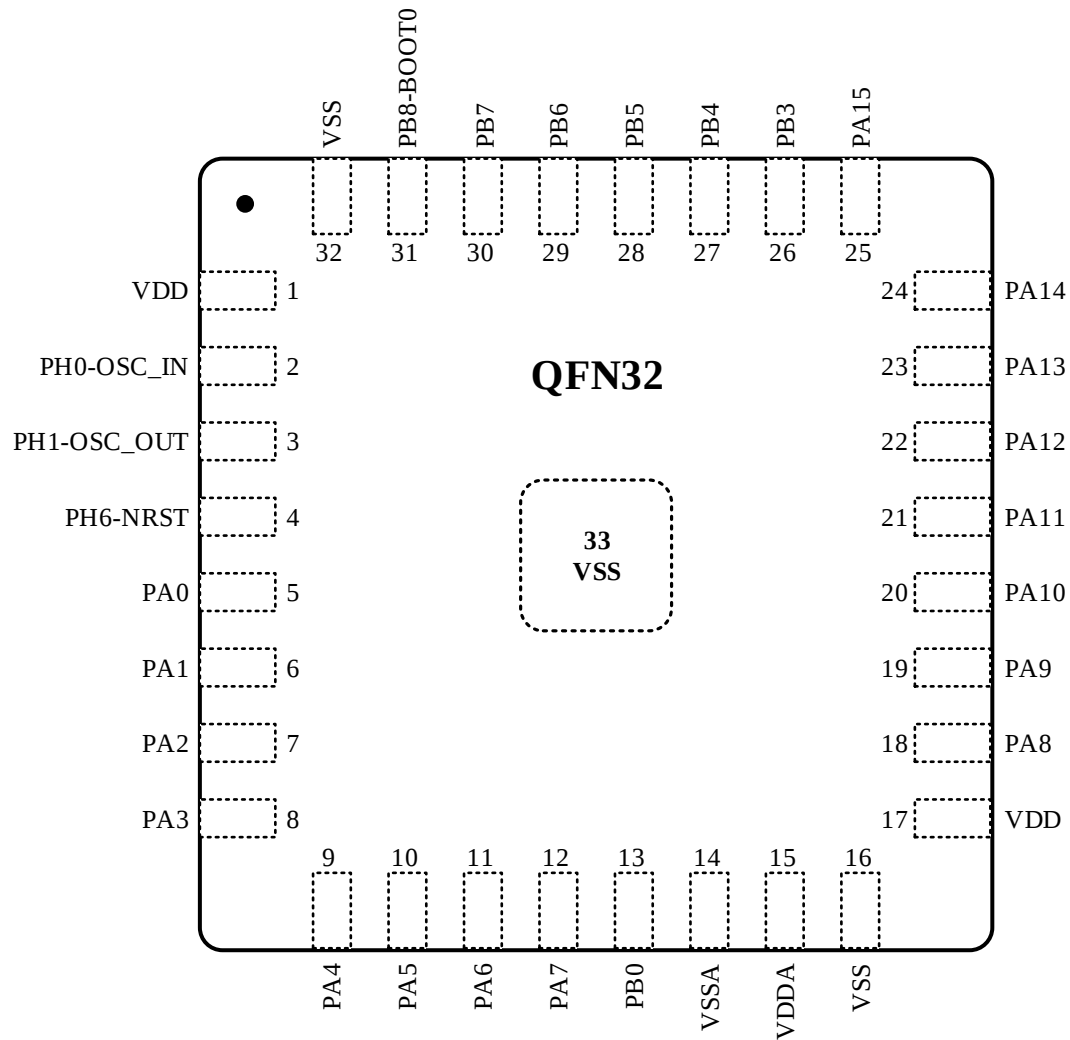


3.1.2 QFN32 Package

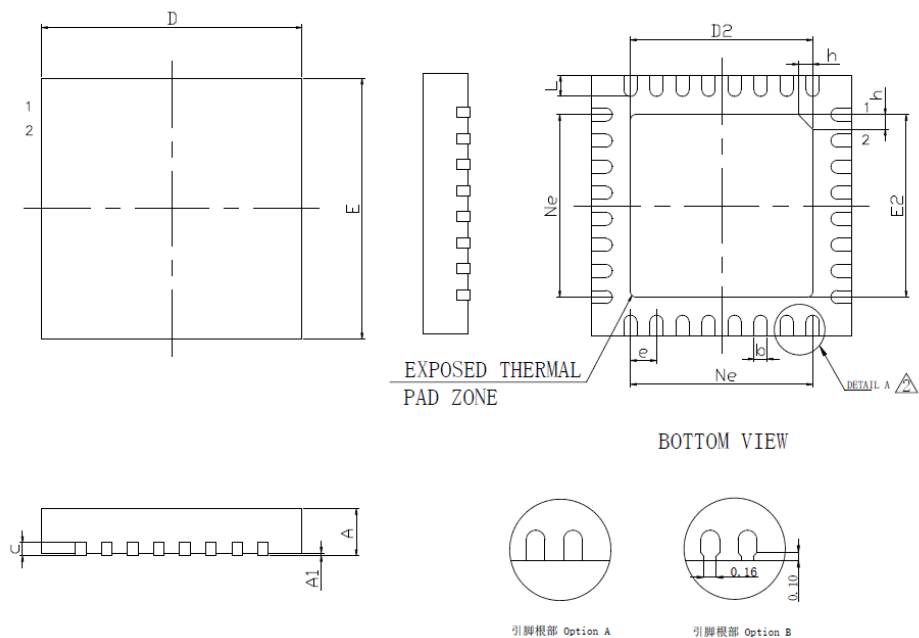


SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	—	0.02	0.05
b	0.18	0.25	0.30
c	0.18	0.20	0.25
D	4.90	5.00	5.10
D2	3.40	3.50	3.60
e	0.50BSC		
Ne	3.50BSC		
E	4.90	5.00	5.10
E2	3.40	3.50	3.60
L	0.35	0.40	0.45
h	0.30	0.35	0.40

3.2 UQFN48


3.2.1 UQFN48 Pinout

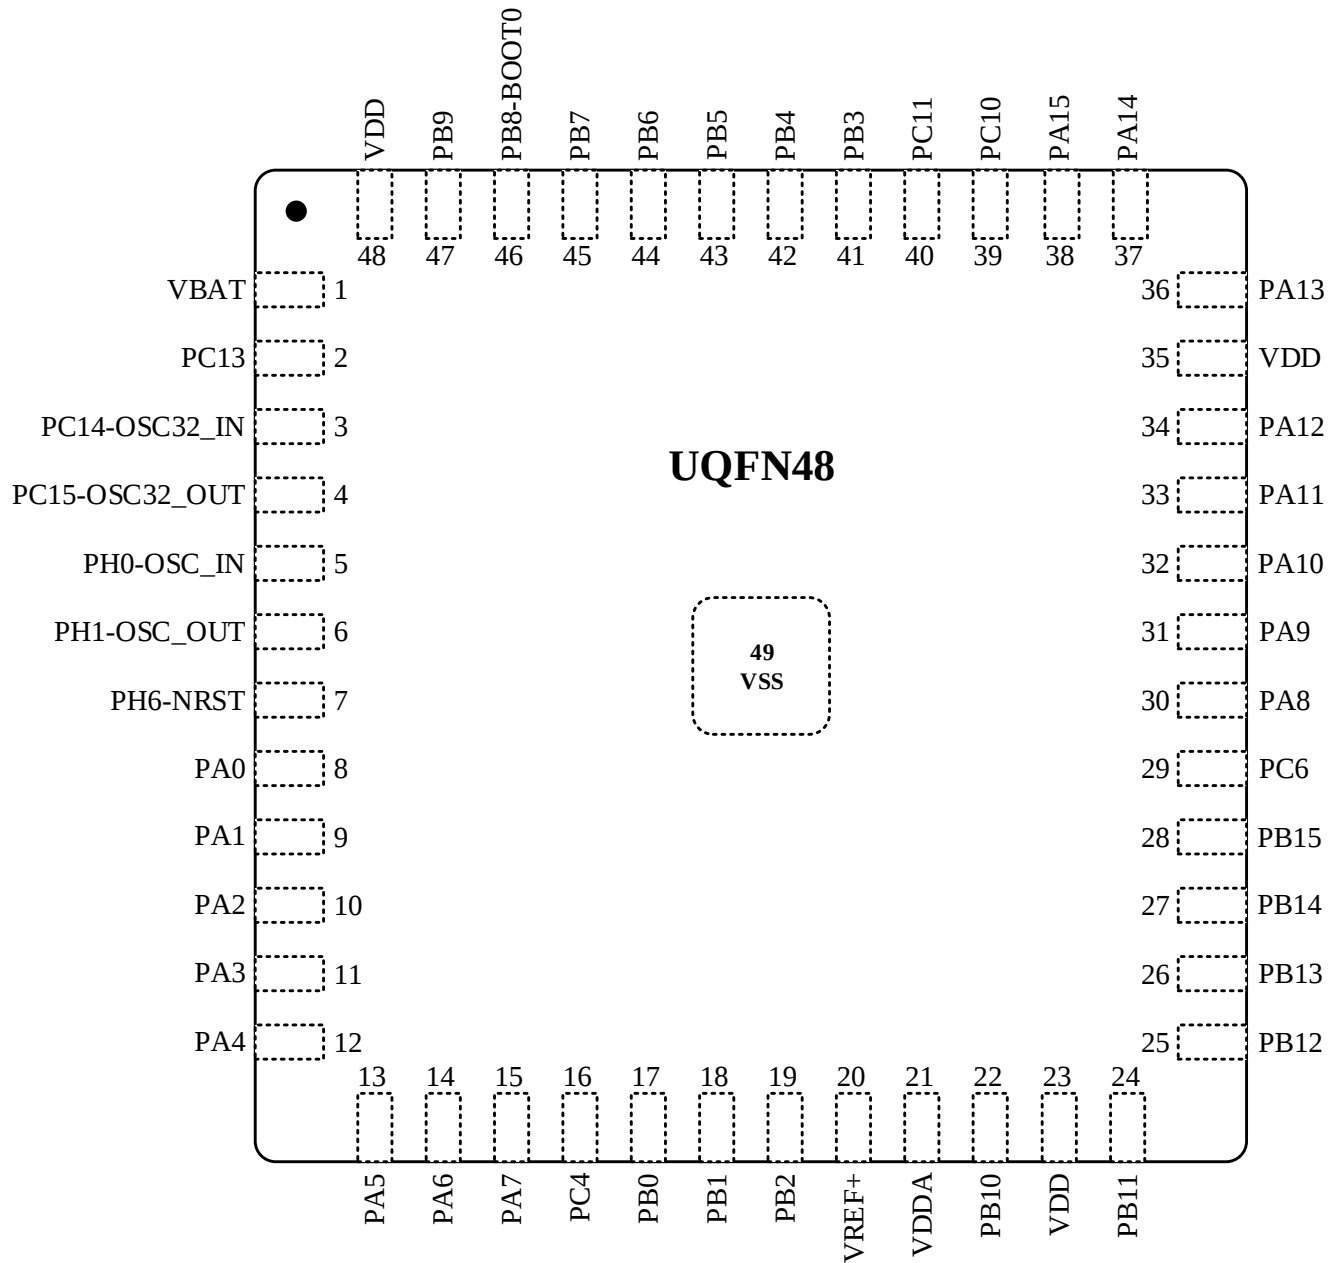

3.2.2 UQFN48 Package

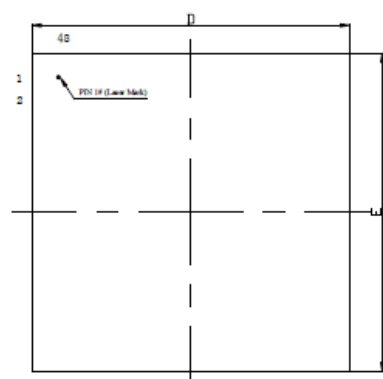


TOP VIEW

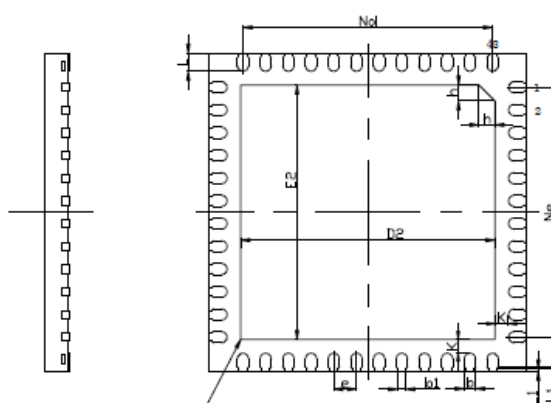

EXPOSED THERMAL
PAD ZONE

BOTTOM VIEW




SIDE VIEW

** 特殊设计: 无;


SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.50	0.55	0.60
A1	0	0.02	0.05
b	0.20	0.25	0.30
b1	0.18REF		
c	0.152REF		
D	6.90	7.00	7.10
D2	5.50	5.60	5.70
Nd	5.50BSC		
e	0.50BSC		
E	6.90	7.00	7.10
E2	5.50	5.60	5.70
Ne	5.50BSC		
L	0.35	0.40	0.45
L1	0	0.05	0.10
K	0.30REF		
h	0.30	0.35	0.40

3.3 LQFP48

3.3.1 LQFP48 Pinout

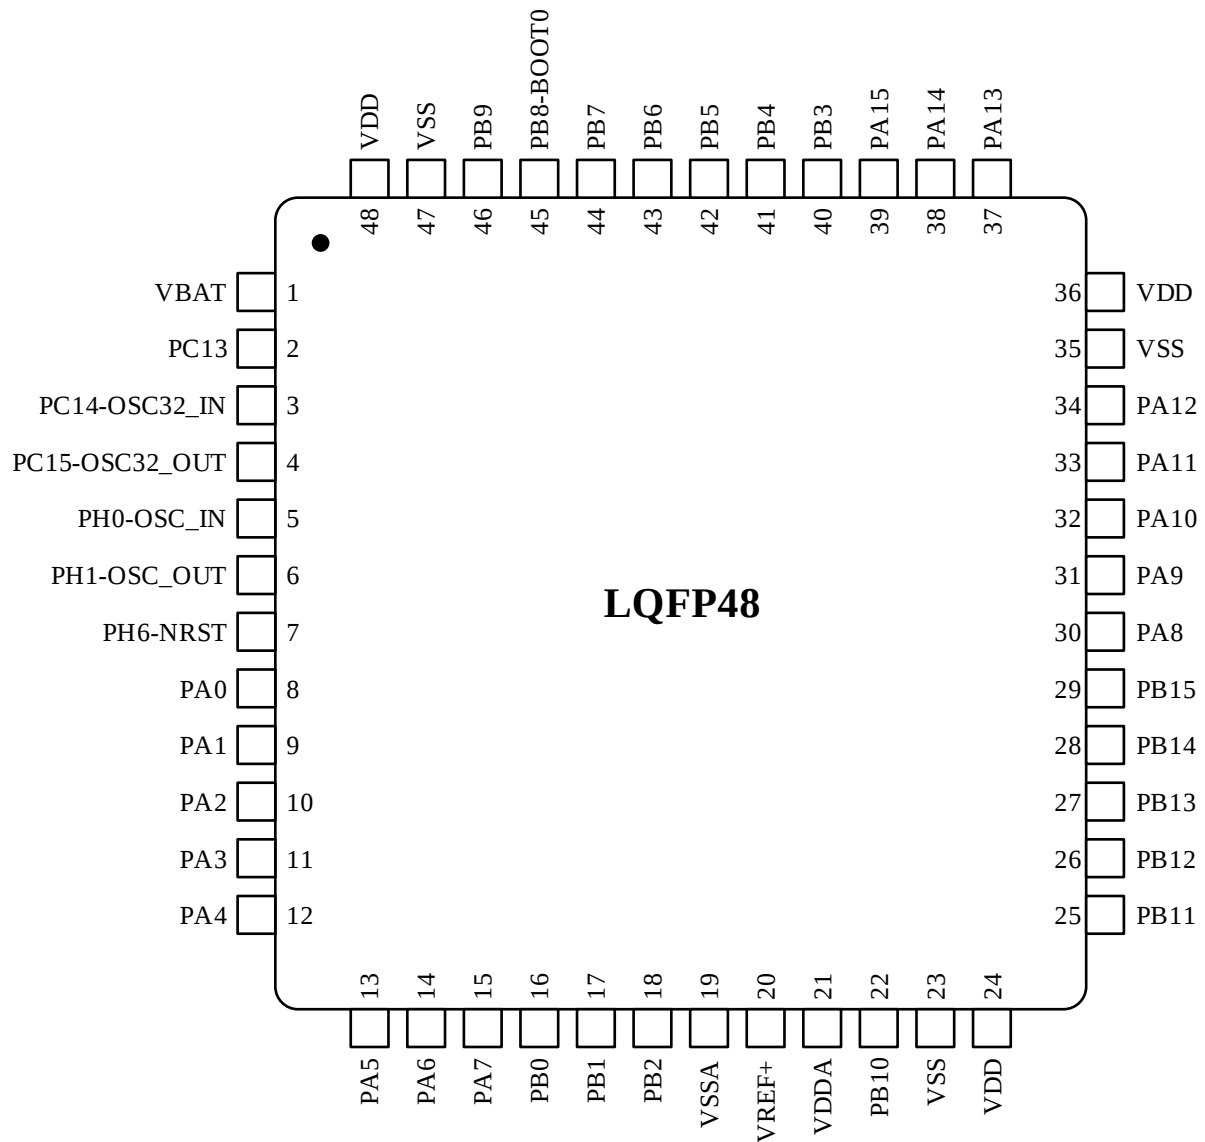


3.3.2 LQFP48 Package




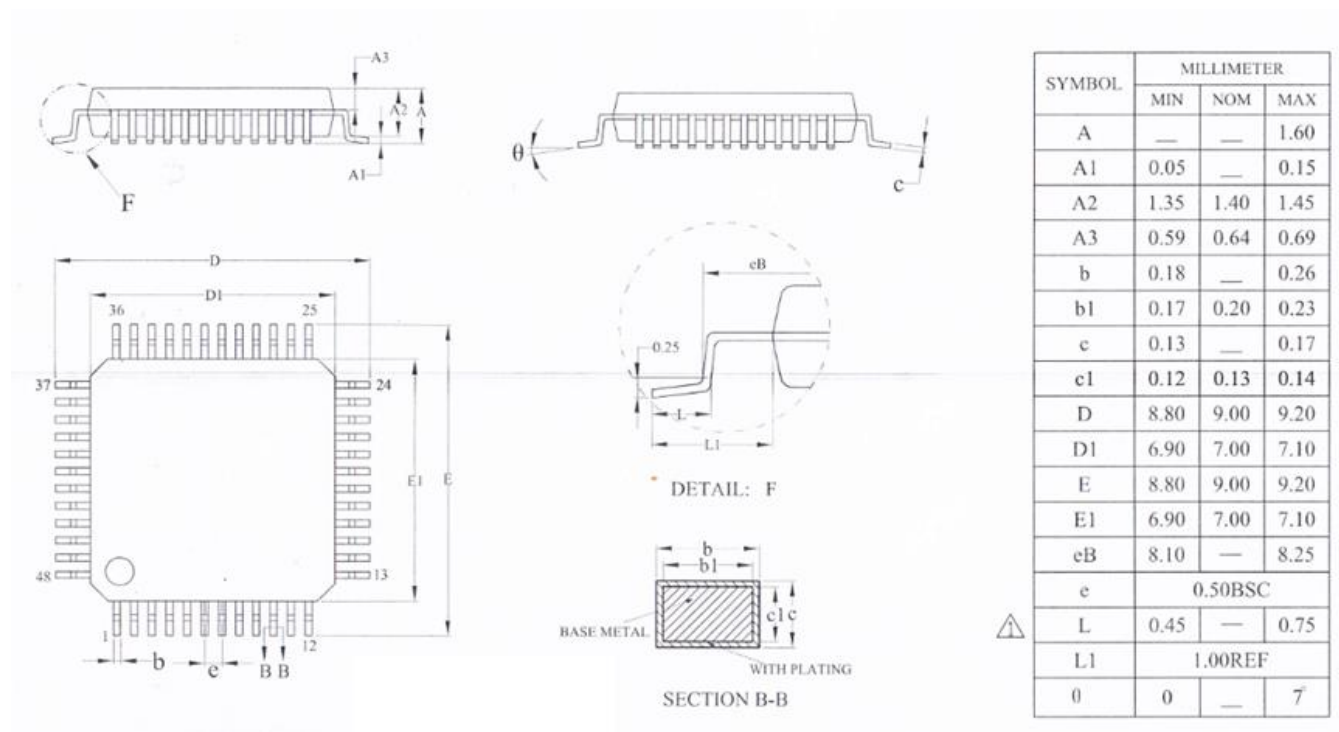


3.4 LQFP64


3.4.1 LQFP64 Pinout

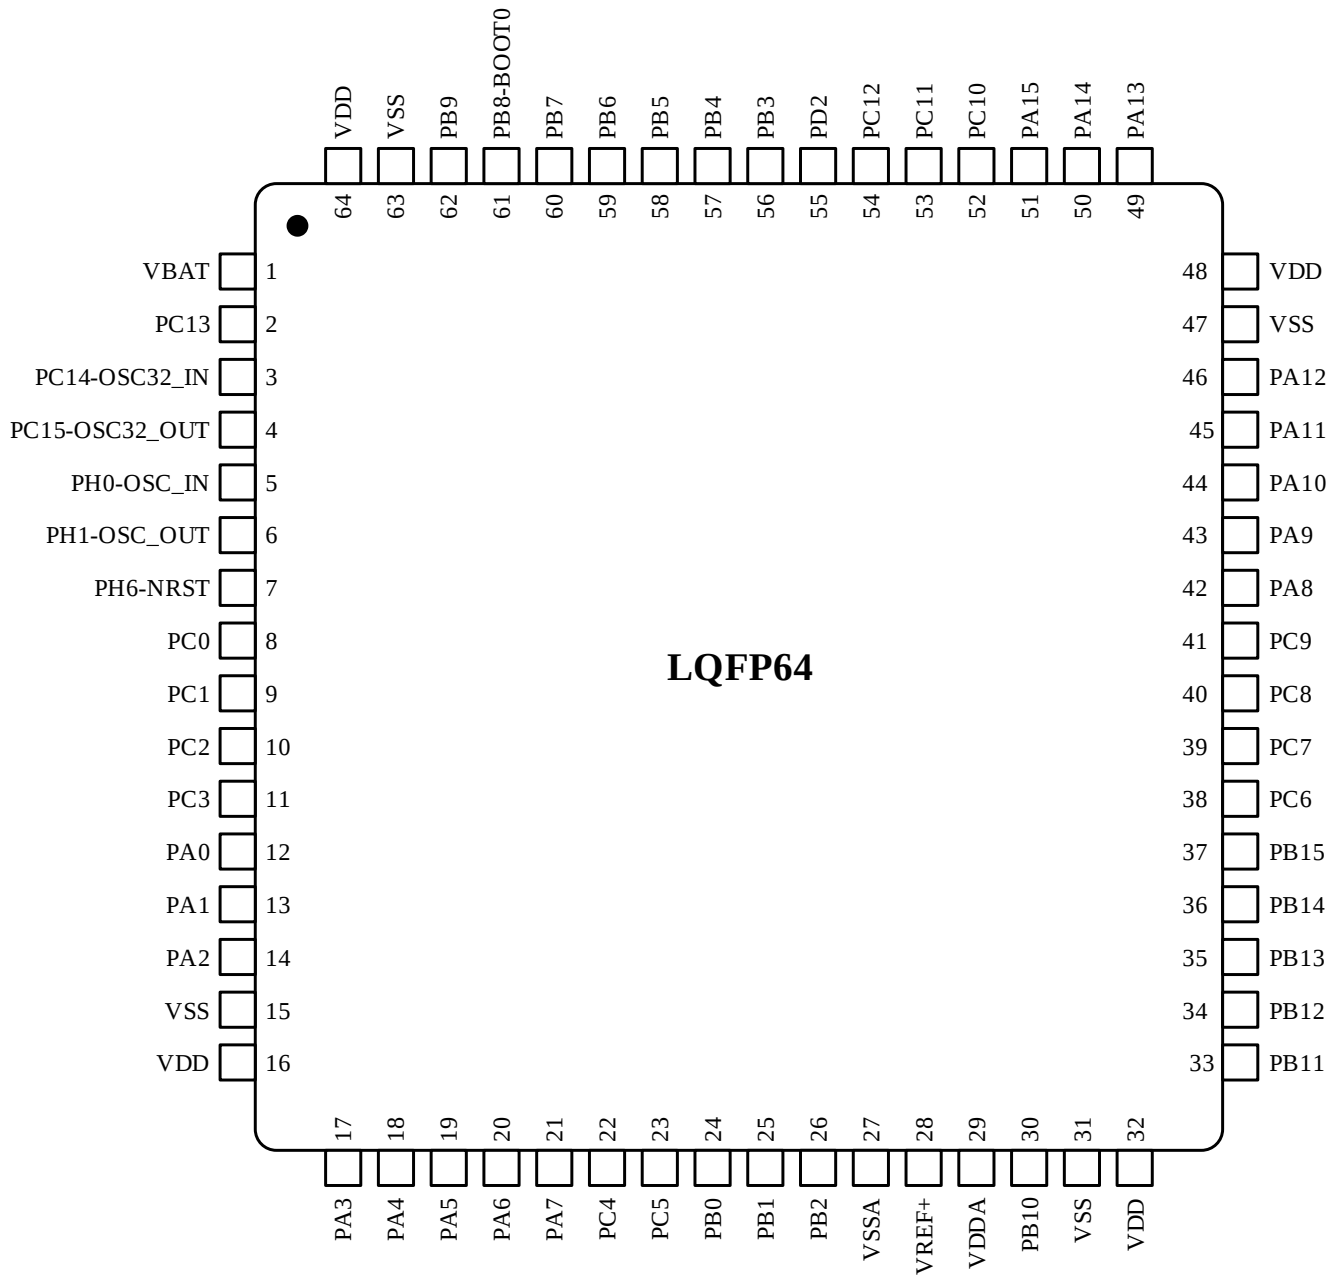

3.4.2 LQFP64 Package

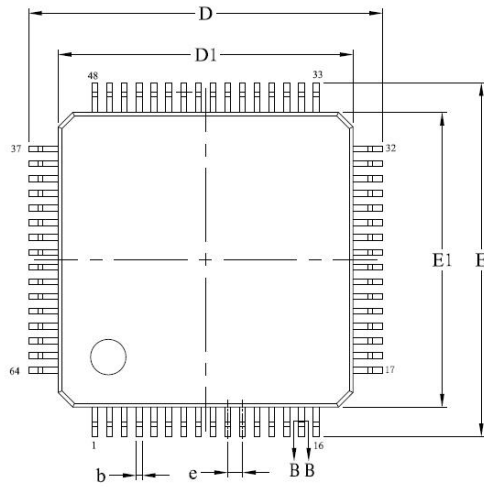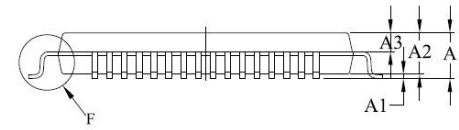

DETAIL: F




SECTION B-B


SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	—	—	1.60
A1	0.05	—	0.15
A2	1.35	1.40	1.45
A3	0.59	0.64	0.69
b	0.18	—	0.26
b1	0.17	0.20	0.23
c	0.13	—	0.17
c1	0.12	0.13	0.14
D	11.80	12.00	12.20
D1	9.90	10.00	10.10
E	11.80	12.00	12.20
E1	9.90	10.00	10.10
e	0.50BSC		
eB	11.05	—	11.25
L	0.45	—	0.75
L1	1.00REF		
θ	0	—	7°

3.5 LQFP80

3.5.1 LQFP80 Pinout

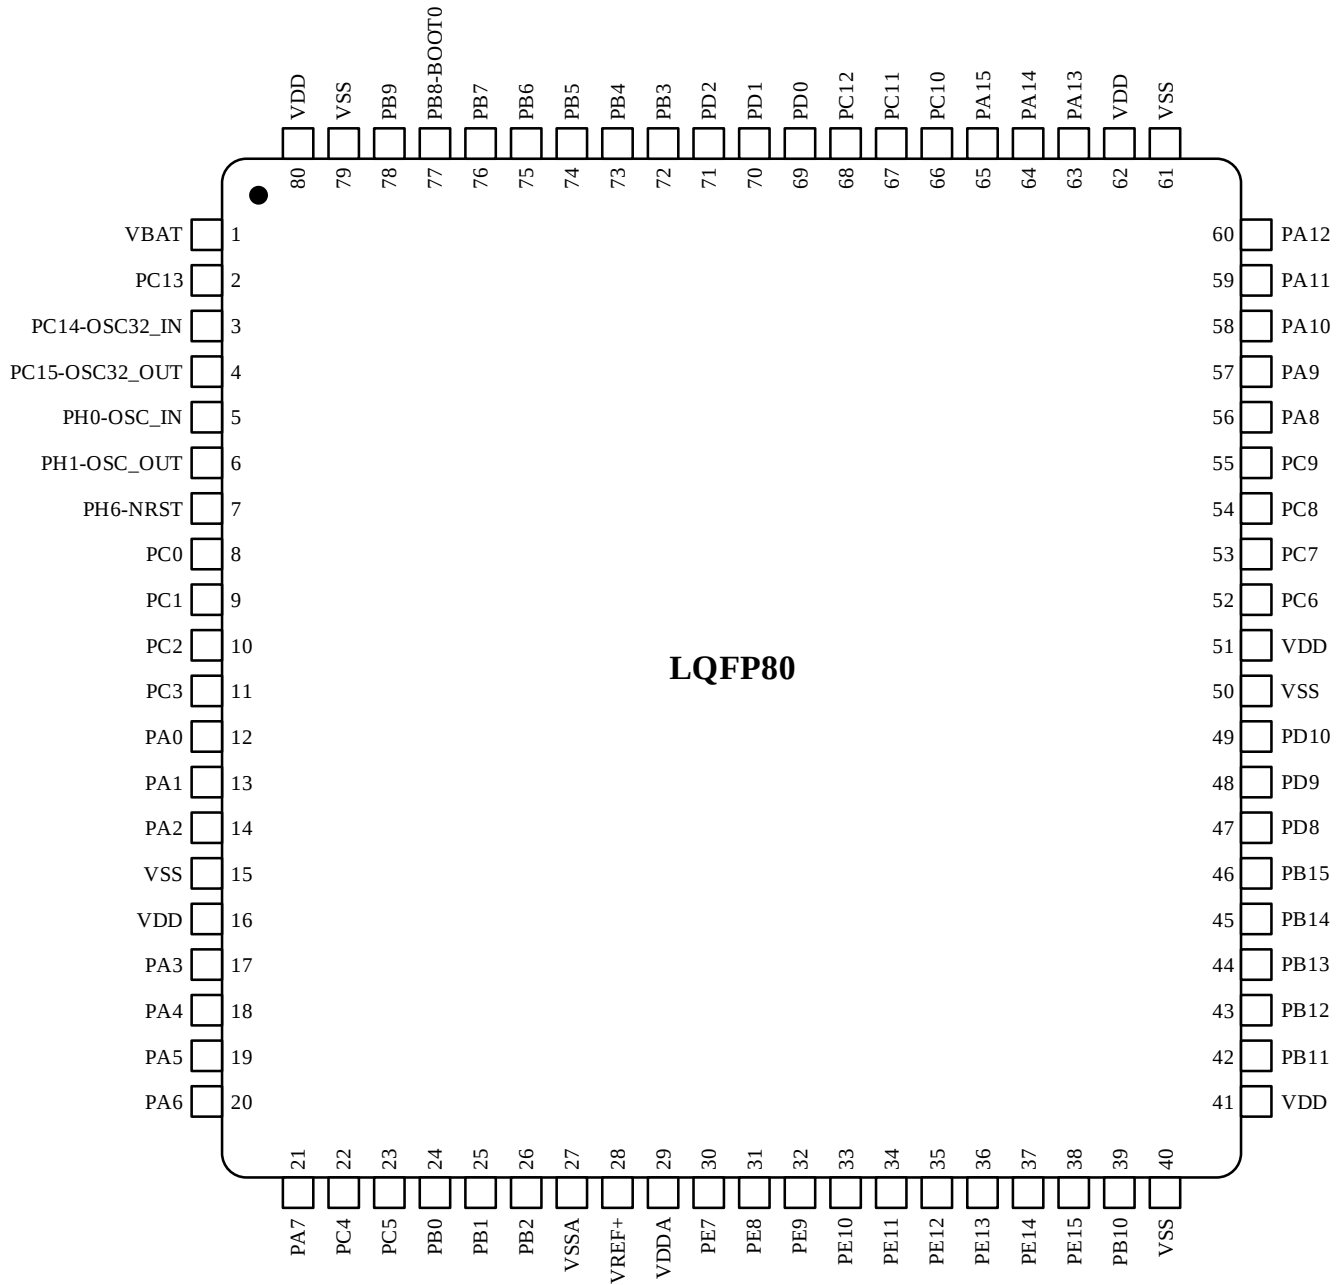


3.5.2 LQFP80 Package

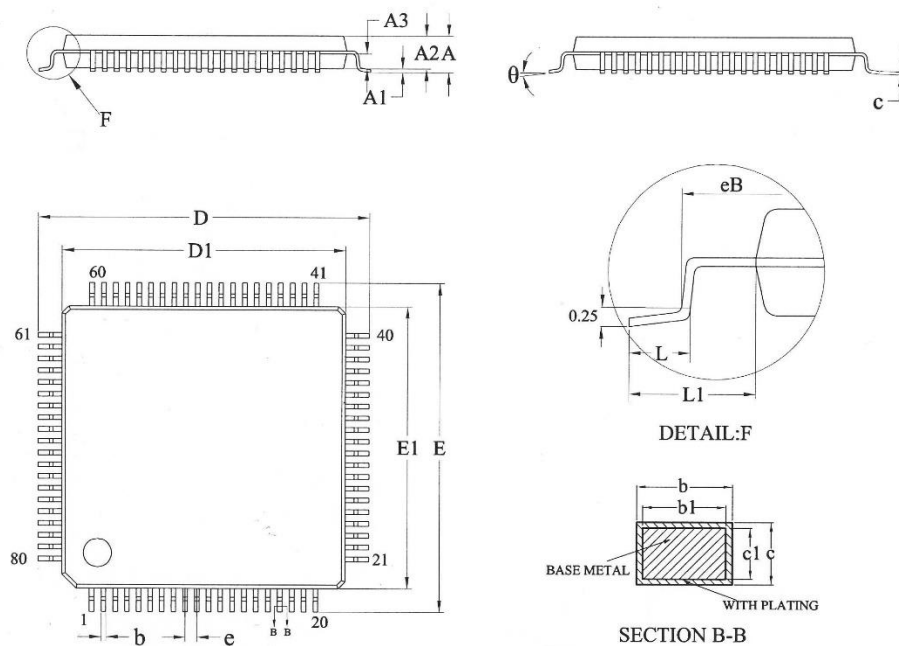




SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	—	—	1.60
A1	0.05	—	0.15
A2	1.35	1.40	1.45
A3	0.59	0.64	0.69
b	0.18	—	0.26
b1	0.17	0.20	0.23
c	0.13	—	0.17
c1	0.12	0.13	0.14
D	13.80	14.00	14.20
D1	11.90	12.00	12.10
E	13.80	14.00	14.20
E1	11.90	12.00	12.10
eB	13.05	—	13.25
e	0.50BSC		
L	0.45	0.60	0.75
L1	1.00REF		
θ	0	—	7°

3.6 LQFP100


3.6.1 LQFP100 Pinout

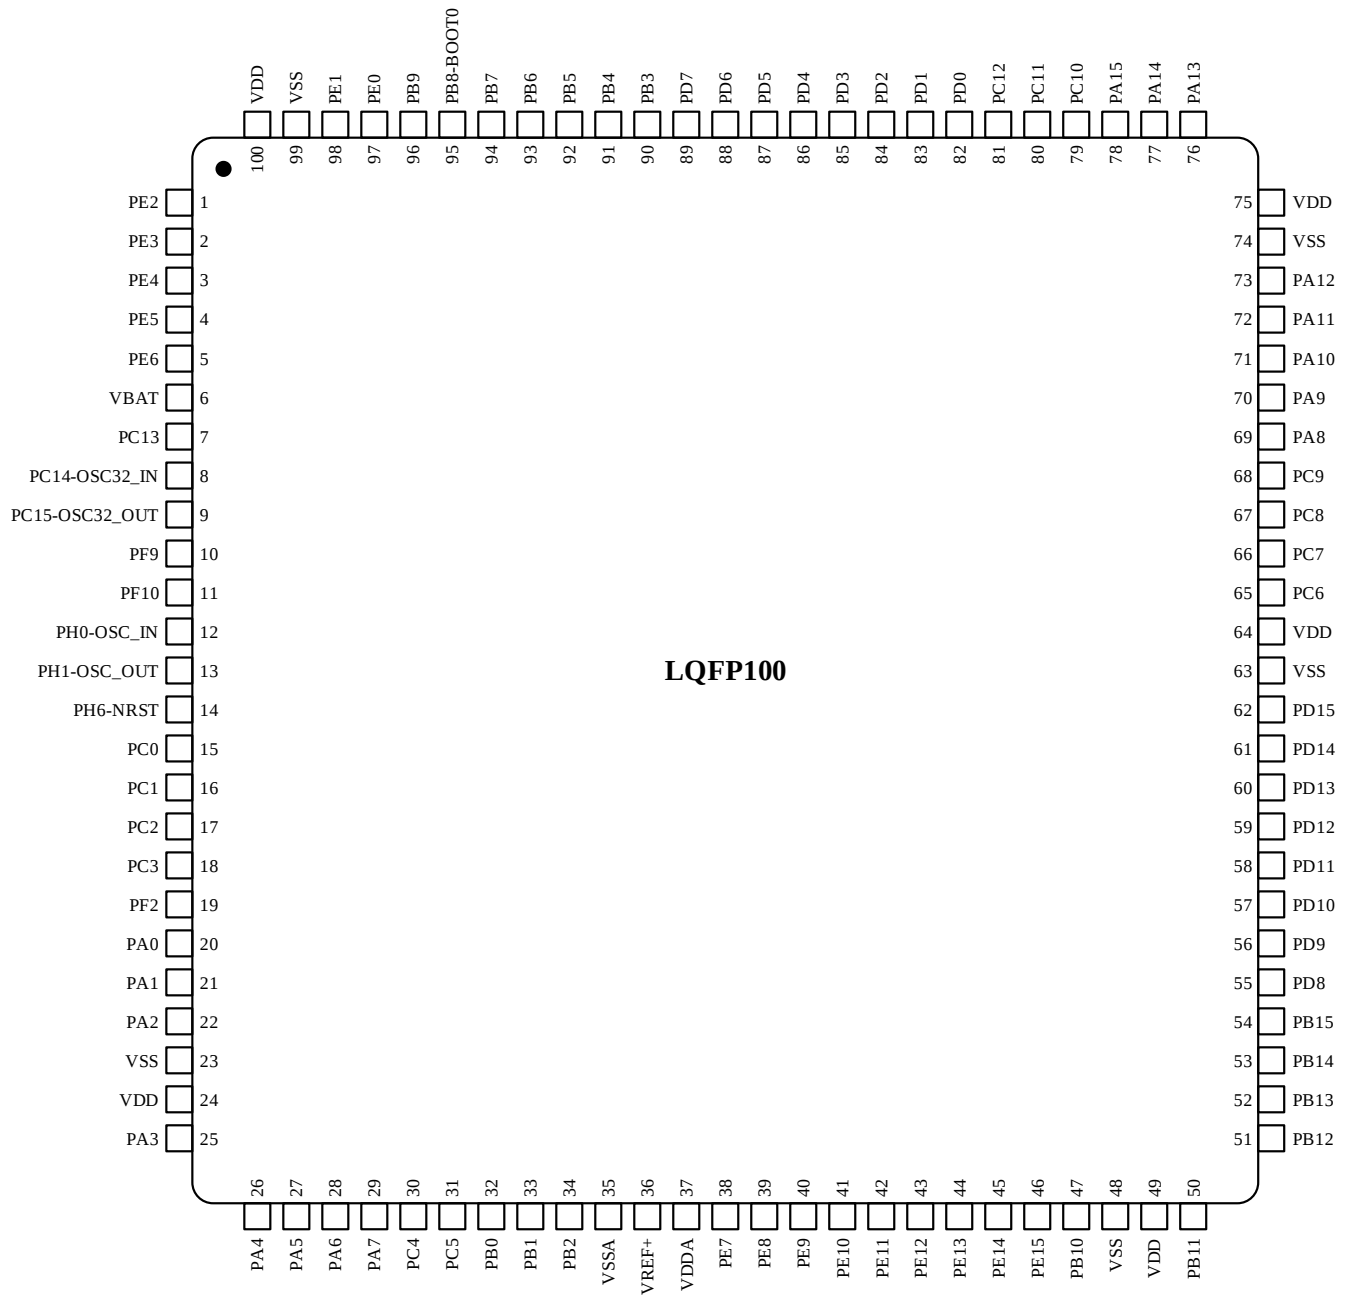

3.6.2 LQFP100 Package

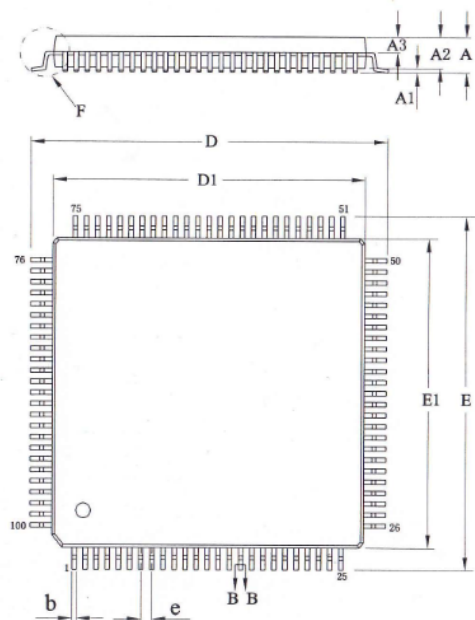

DETAIL: F

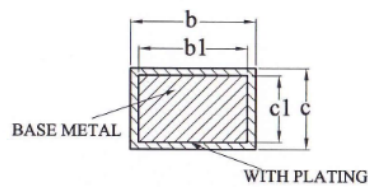


SECTION B-B


SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	—	—	1.60
A1	0.05	—	0.15
A2	1.35	1.40	1.45
A3	0.59	0.64	0.69
b	0.18	—	0.26
b1	0.17	0.20	0.23
c	0.13	—	0.17
c1	0.12	0.13	0.14
D	15.80	16.00	16.20
D1	13.90	14.00	14.10
E	15.80	16.00	16.20
E1	13.90	14.00	14.10
eB	15.05	—	15.35
e	0.50BSC		
L	0.45	—	0.75
L1	1.00REF		
θ	0	—	7°

3.7 LQFP128

3.7.1 LQFP128 Pinout

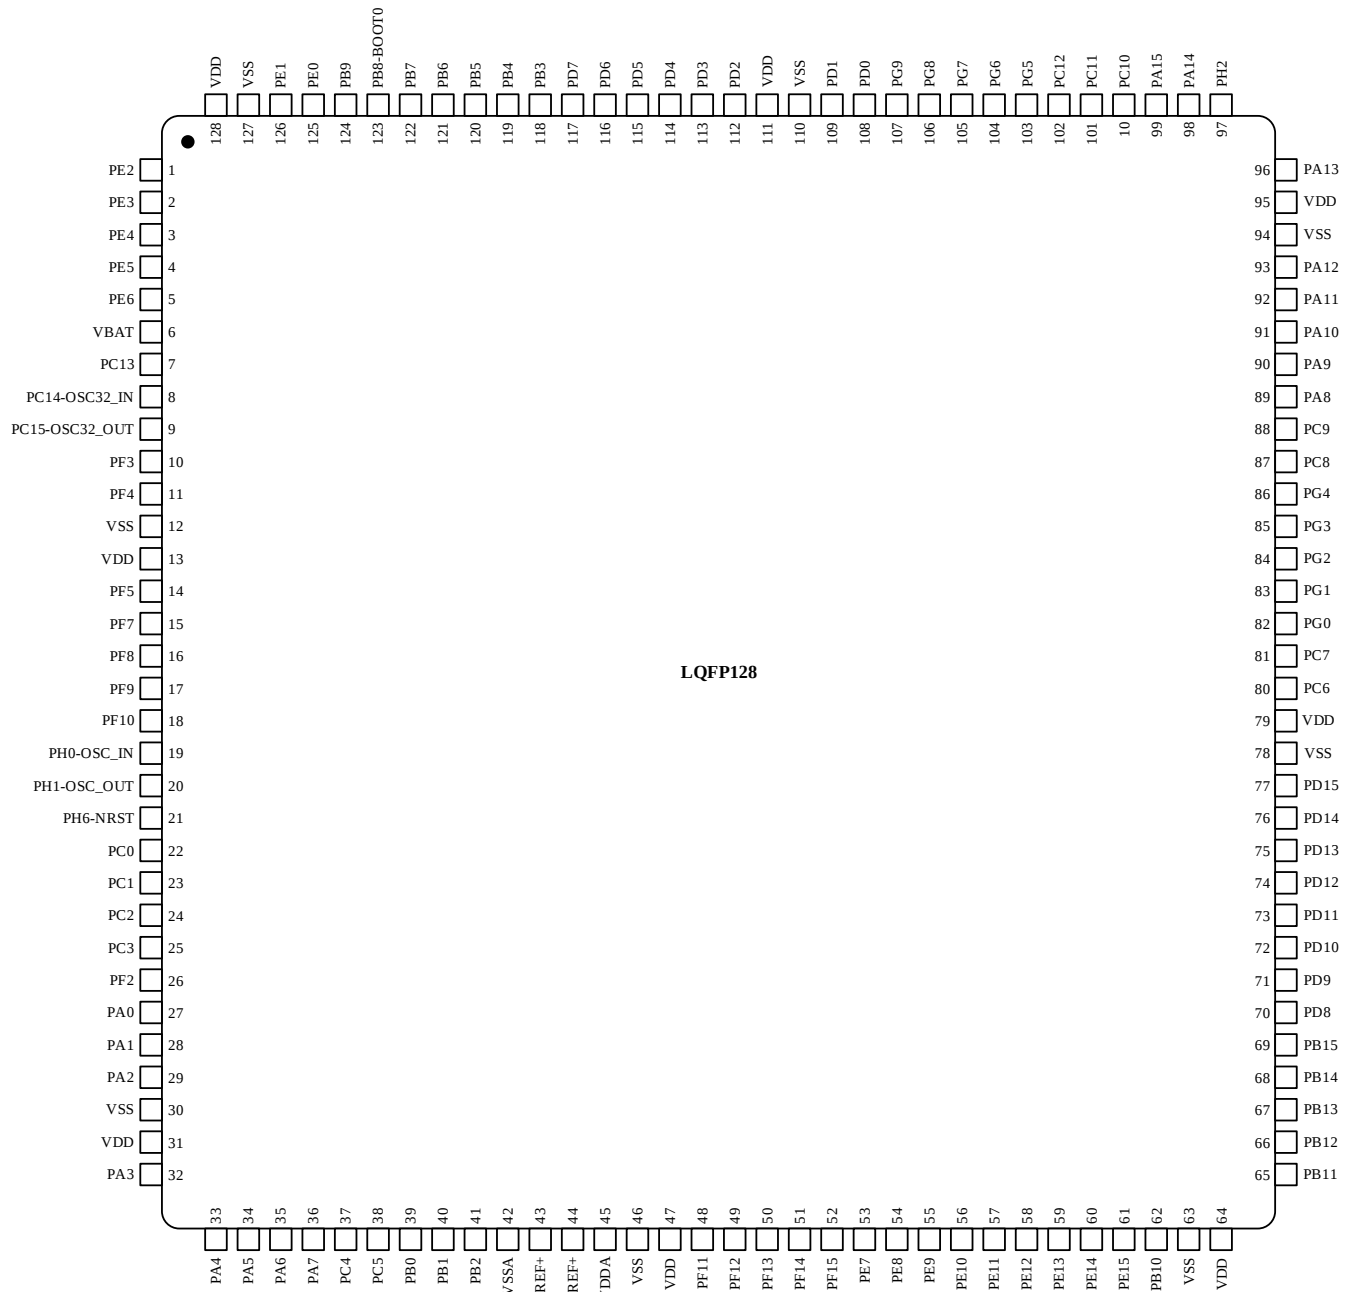

3.7.2 LQFP128 Package

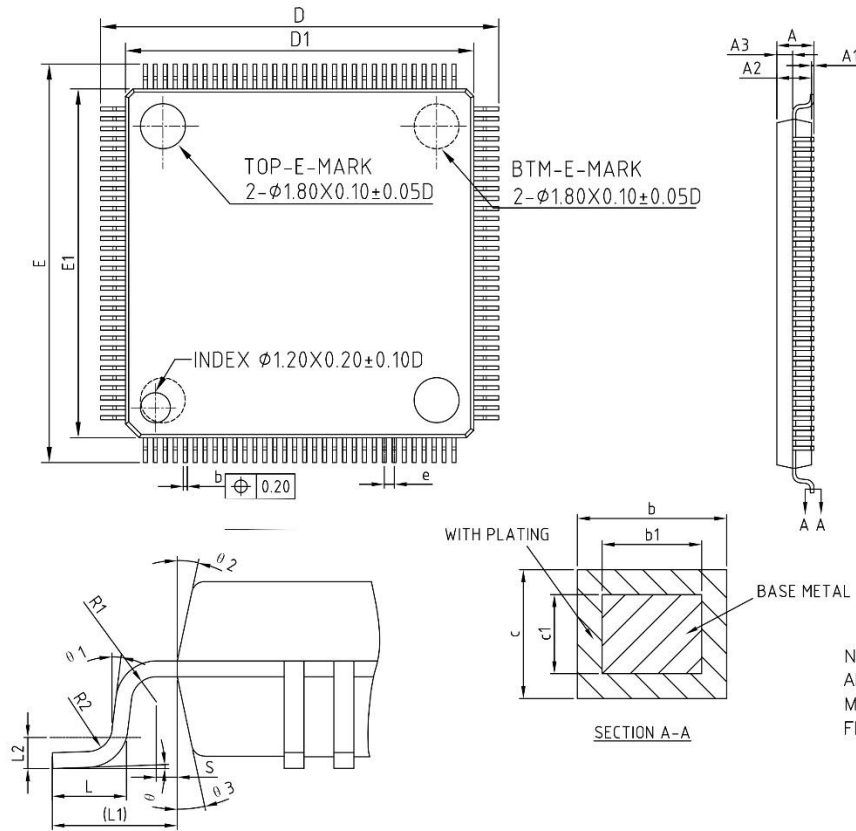

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	—	—	1.60
A1	0.05	—	0.15
A2	1.35	1.40	1.45
A3	0.59	0.64	0.69
b	0.14	—	0.23
b1	0.13	0.16	0.19
c	0.13	—	0.18
c1	0.12	0.127	0.134
D	15.80	16.00	16.20
D1	13.90	14.00	14.10
E	15.80	16.00	16.20
E1	13.90	14.00	14.10
e	0.40BSC		
L	0.45	0.60	0.75
L1	1.00REF		
L2	0.25BSC		
R1	0.08	—	—
R2	0.08	—	0.20
S	0.20	—	—
θ	0°	3.5°	7°
θ_1	0°	—	—
θ_2	11°	12°	13°
θ_3	11°	12°	13°

NOTES:
ALL DIMENSIONS REFER TO JEDEC STANDARD
MS-026 BEE DO NOT INCLUDE MOLD
FLASH OR PROTRUSIONS.

4 Version History

Version	Date	Changes
V1.0.0	2024.11.12	Initial release
V1.1.0	2025.5.21	Addition of models N32H474KEQ7/8 and N32H474KCQ7/8
V1.2.0	2025.8.27	1.Modify the naming convention diagram of the ordering information section 2.Modify the maximum core frequency to 240MHz at 105 °C and 200MHz at 125 °C

5 Disclaimer

This document is the exclusive property of NSING TECHNOLOGIES PTE. LTD. (Hereinafter referred to as NSING). This document, and the product of NSING described herein (Hereinafter referred to as the Product) are owned by NSING under the laws and treaties of Republic of Singapore and other applicable jurisdictions worldwide. The intellectual properties of the product belong to NSING Technologies Inc. and NSING Technologies Inc. does not grant any third party any license under its patents, copyrights, trademarks, or other intellectual property rights. Names and brands of third party may be mentioned or referred thereto (if any) for identification purposes only. NSING reserves the right to make changes, corrections, enhancements, modifications, and improvements to this document at any time without notice. Please contact NSING and obtain the latest version of this document before placing orders. Although NSING has attempted to provide accurate and reliable information, NSING assumes no responsibility for the accuracy and reliability of this document. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. In no event shall NSING be liable for any direct, indirect, incidental, special, exemplary, or consequential damages arising in any way out of the use of this document or the Product. NSING Products are neither intended nor warranted for usage in systems or equipment, any malfunction or failure of which may cause loss of human life, bodily injury or severe property damage. Such applications are deemed, Insecure Usage'. Insecure usage includes, but is not limited to: equipment for surgical implementation, atomic energy control instruments, airplane or spaceship instruments, all types of safety devices, and other applications intended to supporter sustain life. All Insecure Usage shall be made at user's risk. User shall indemnify NSING and hold NSING harmless from and against all claims, costs, damages, and other liabilities, arising from or related to any customer's Insecure Usage Any express or implied warranty with regard to this document or the Product, including, but not limited to. The warranties of merchantability, fitness for a particular purpose and non-infringement are disclaimed to the fullest extent permitted by law. Unless otherwise explicitly permitted by NSING, anyone may not use, duplicate, modify, transcribe or otherwise distribute this document for any purposes, in whole or in part.