



## JLink tool adds Nations chip flow V1.1

# CONTENTS

<b>1</b>	<b>OVERVIEW.....</b>	<b>3</b>
1.1	INTRODUCE .....	3
<b>2</b>	<b>ADD PROCESS .....</b>	<b>4</b>
2.1	MODIFY AND ADD CONFIGURATION FILES AND FOLDERS .....	4
2.1.1	<i>Modify the JLinkDevices configuration document .....</i>	<i>4</i>
2.1.2	<i>Add downloading algorithm file of Nations .....</i>	<i>5</i>
2.1.3	<i>Add JFlash project files of Nations .....</i>	<i>6</i>
2.1.4	<i>Add an application that unlocked the Nations chip read protection of L1 level.....</i>	<i>7</i>
2.2	ADD JFLASH PROGRAMMING PROJECT .....	7
2.2.1	<i>Method 1: Choose the chip by yourself .....</i>	<i>8</i>
2.2.2	<i>Method 2: Directly select the JFlash project provided by Nations.....</i>	<i>11</i>
2.3	UNLOCK NATIONS CHIP READ PROTECTION OF L1 LEVEL.....	14
<b>3</b>	<b>VERSION HISTORY.....</b>	<b>16</b>
<b>4</b>	<b>LEGAL NOTICE.....</b>	<b>17</b>

# 1 Overview

## 1.1 Introduce

This document describes the following in detail:


1. Add Nations chip to JLink software
2. Program process using JFlash tool
3. Remove the L1 level of read protection for Nations chip with the application program provided by National Technologies

Before you can start adding, you need to install the JLink software platform. The process described in this document is based on version JLink\_v6.40.

## 2 Add process

### 2.1 Modify and add configuration files and folders

Prepare the following configuration files (provided by National Technologies) :

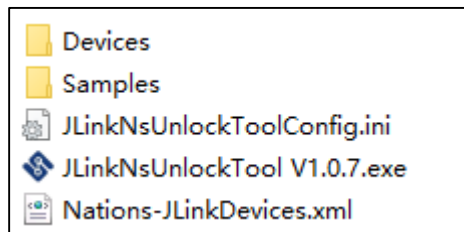


Mainly includes:

1. Device : downloading algorithm file
2. Samples : J-Flash project
3. Nations-JLinkDevices.xml : Nations chip model file that needs to be added
4. JLinkNsUnlockTool V1.0.7.exe : The application to unlock the L1 level read protection of the Nations chip.
5. JLinkNsUnlockToolConfig.ini : Configuration files required to unlock read-protected applications

#### 2.1.1 Modify the JLinkDevices configuration document


- 1) Locate the JLink installation path and open the JLinkDevices document (open with Notepad)

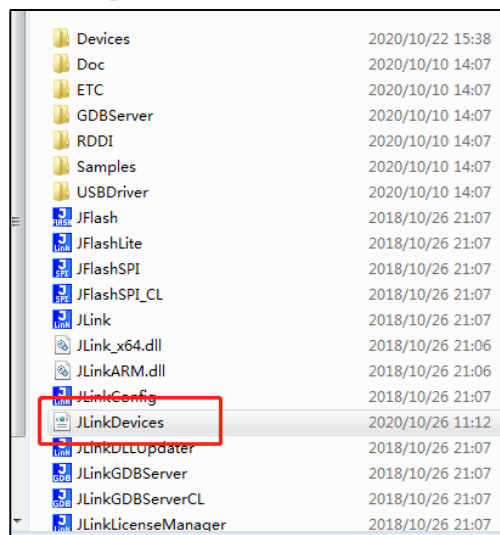


- 2) Open the provided Nations-JLinkDevices document, copy the configuration content of all Nations chips to the end of the JLinkDevices document in the installation path, and click Save. The completed JLinkDevices document reads as follows:




Note: The screenshot of this document takes the V1.0.6 version as an example



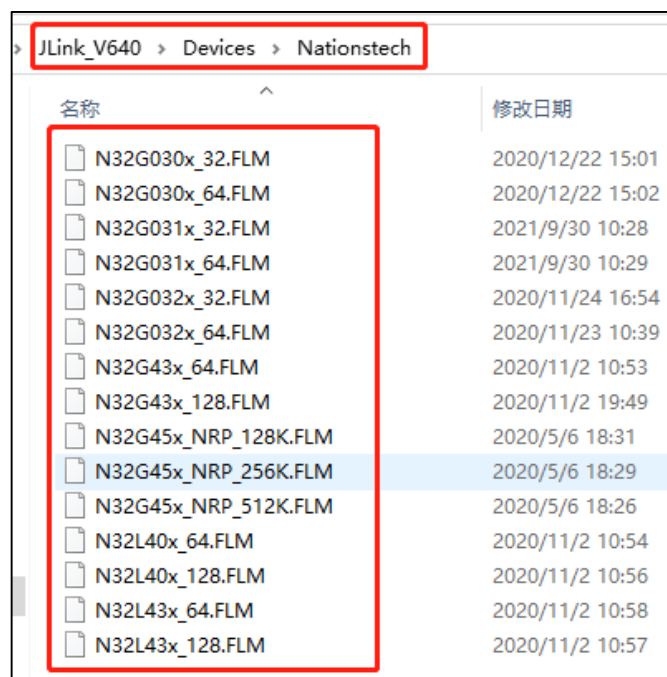


## 2.1.3 Add JFlash project files of Nations

Copy the folders provided in the following path into the JLink installation path

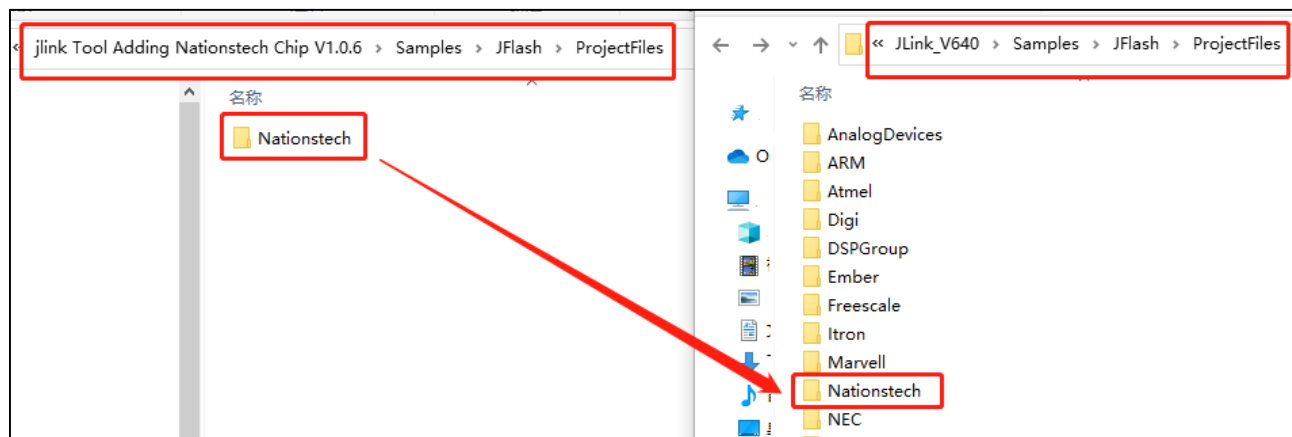


The installation path folder and contents are as follows:

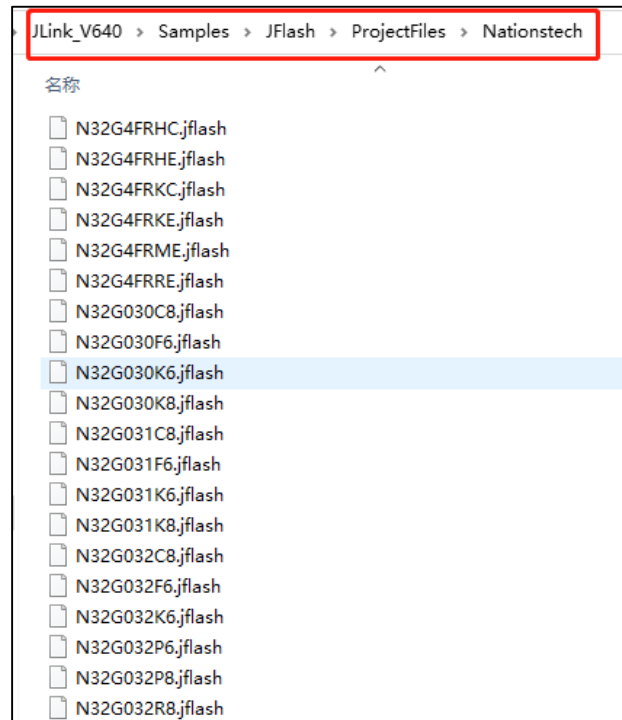

## 2.1.4 Add an application that unlocked the Nations chip read protection of L1 level

Copy the folders provided in the following path into the JLink installation path

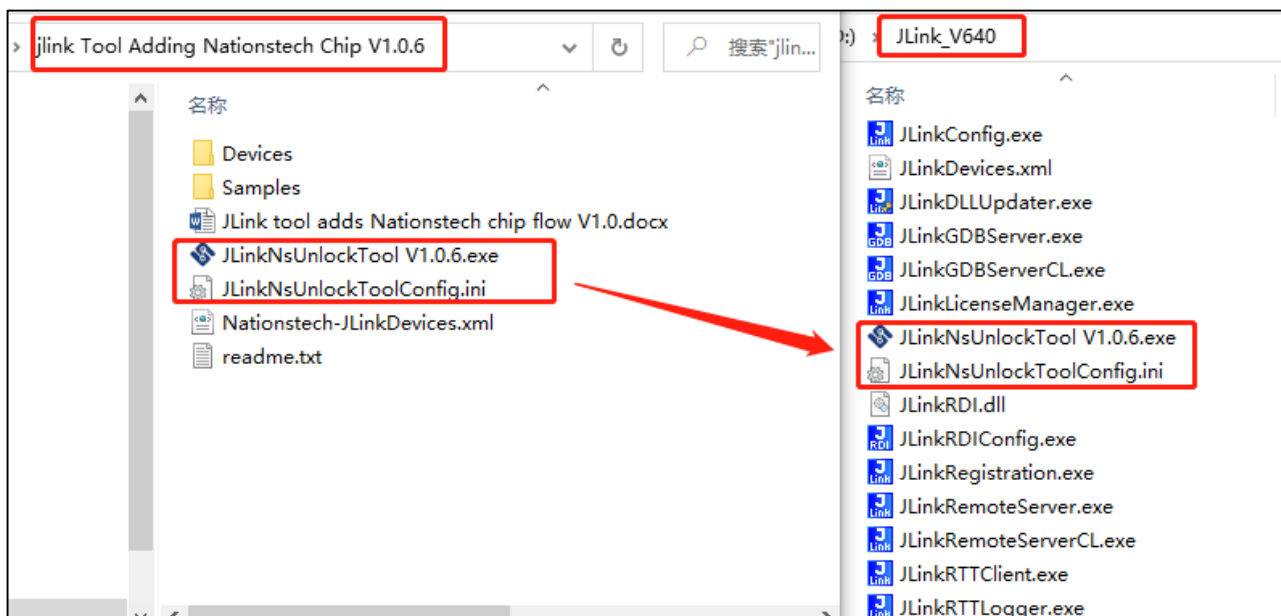


## 2.2 Add JFlash programming project


To use JFlash to program chip bin files, there are two ways:

## 2.2.1 Method 1: Choose the chip by yourself


- 1) Double-click in the installation path to open the JFlash program

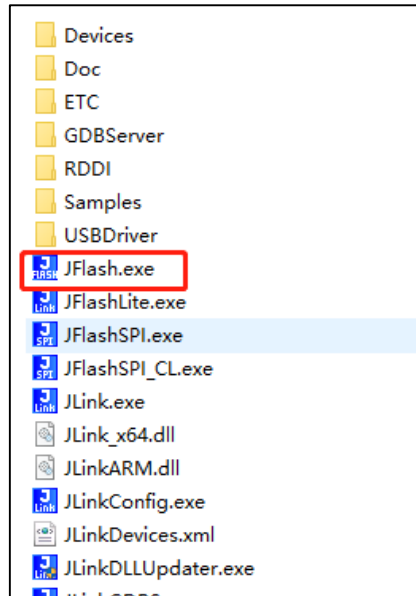


- 2) Select “Create a new project” and click “Start J-Flash”. Click the ellipsis on the right to select the chip

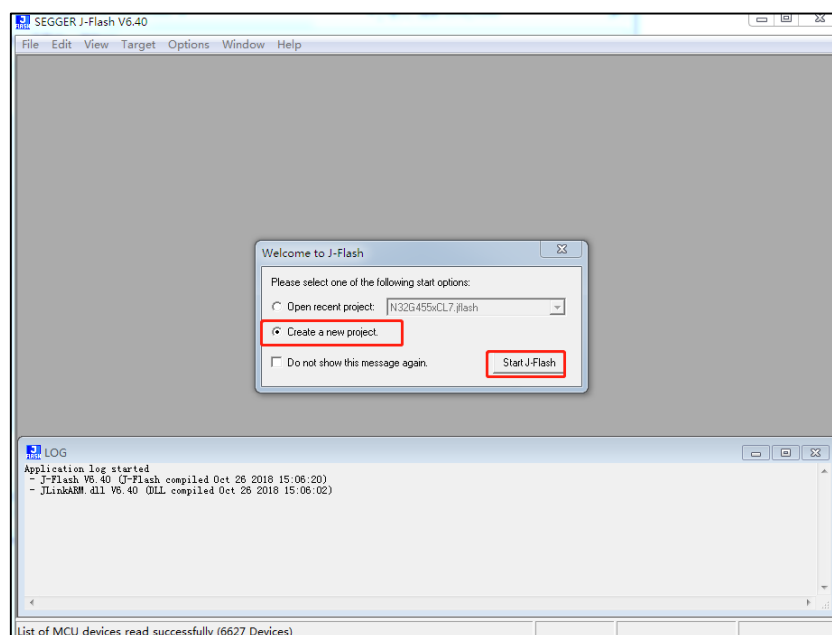




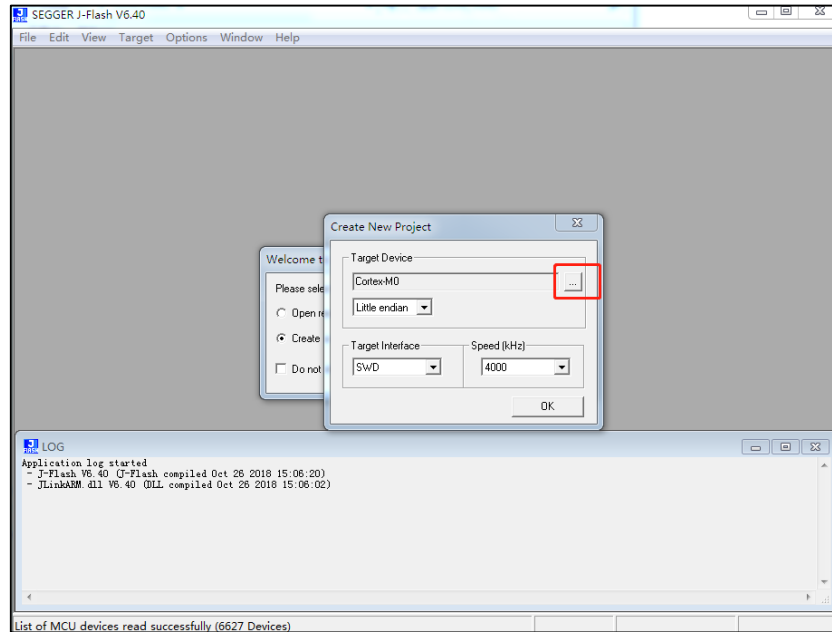


- 3) Go to Nationtech, select the chip you want to program (using N32G032R8L7 as an example), and click OK. Get the following project, display chip name and memory and other related content


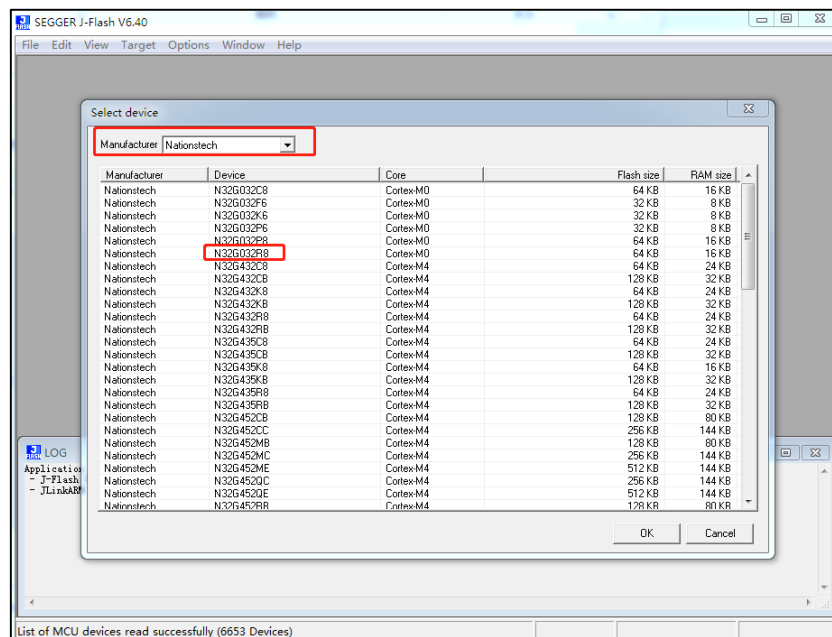


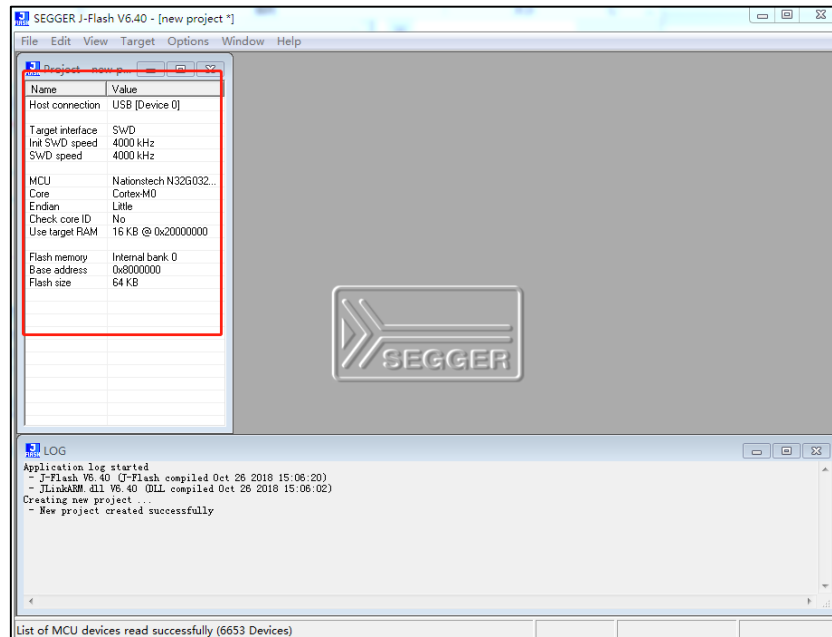

- 4) Use the emulator to connect the development board, drag the bin file you want to program in the blank, write the default address 8000000, and click OK

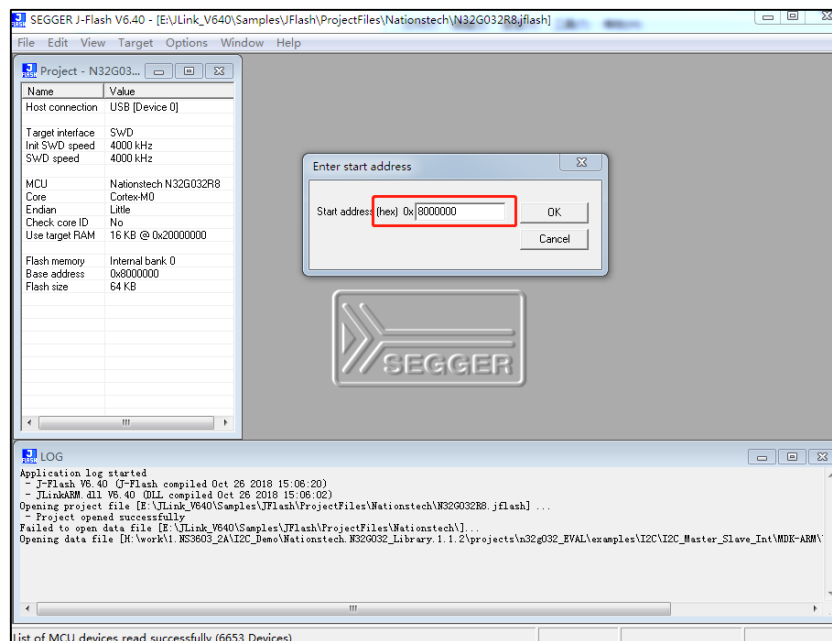


- 5) Open Target and click Production Programming (F7) to start programming. After programming, a successful prompt box will pop up, indicating that programming is successful

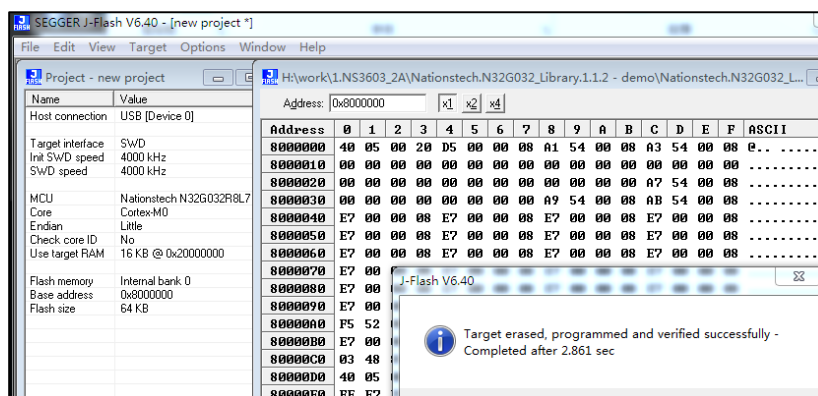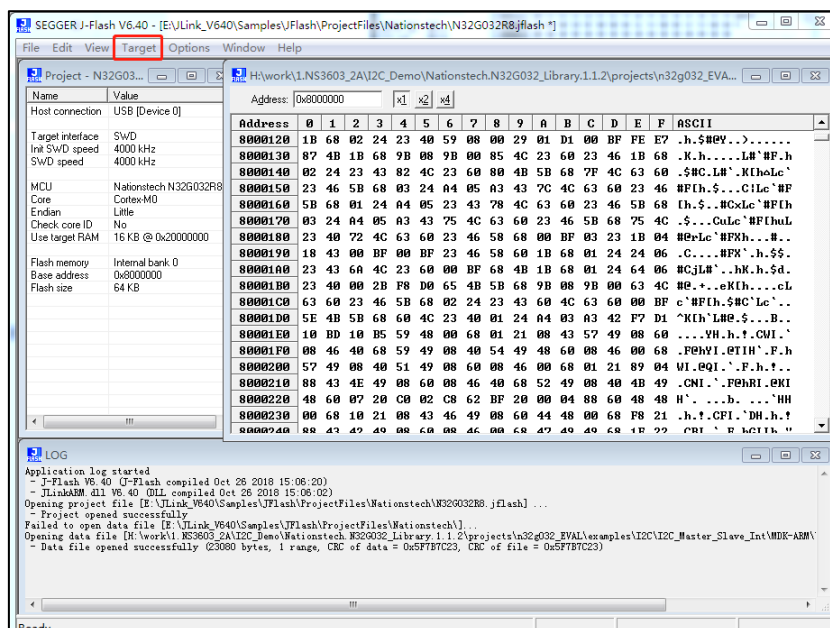



## 2.2.2 Method 2: Directly select the JFlash project provided by Nations


- 1) Double-click in the installation path to open the JFlash program

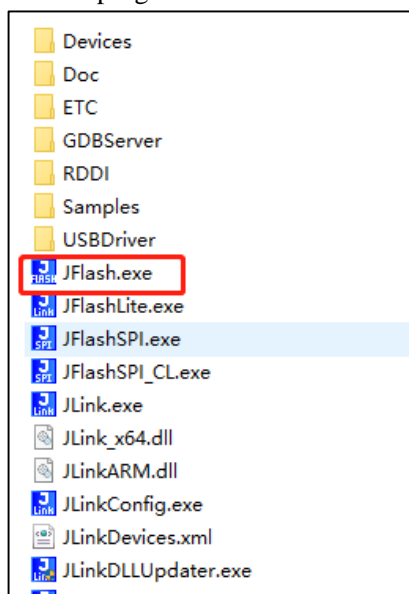


2) Select Open recent project, click the small triangle drop-down box on the right, select Other and follow the following path to find the chip .jflash file you want to program. Then click Start J-Flash

1)

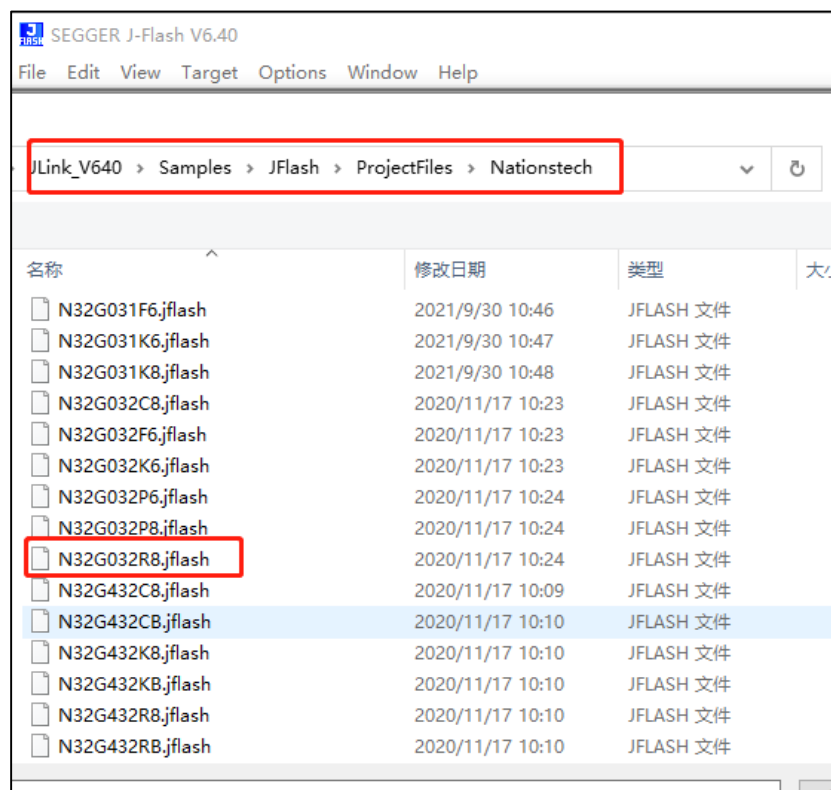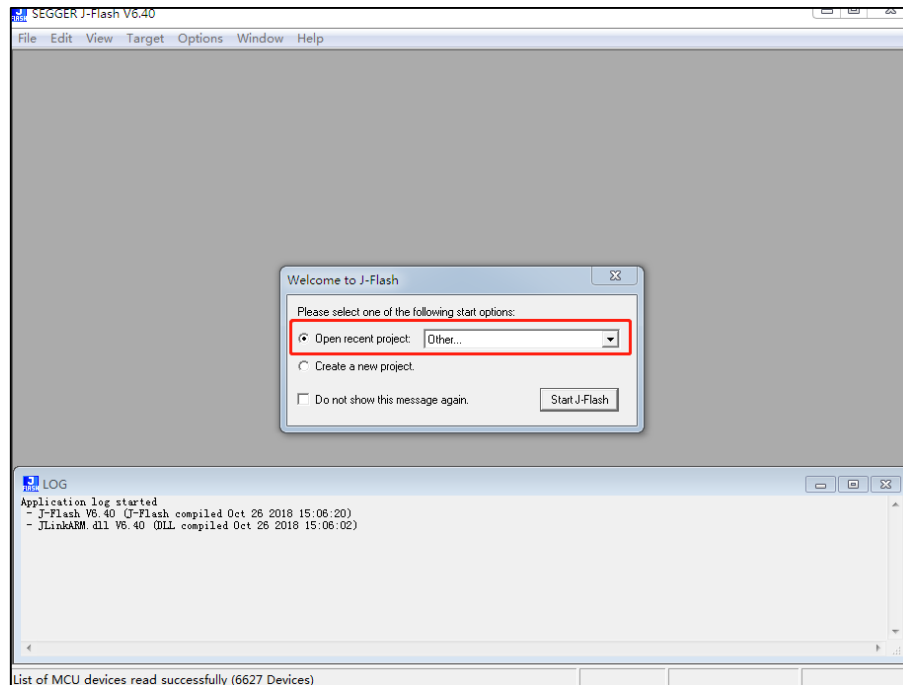


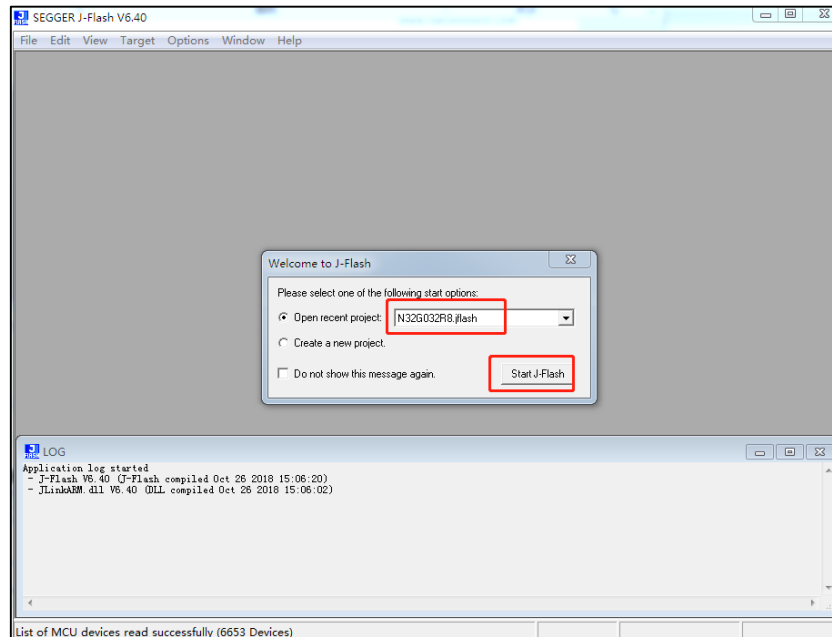


3) Use the emulator to connect the development board, drag the bin file you want to program in the blank, write the default address 8000000, and click OK

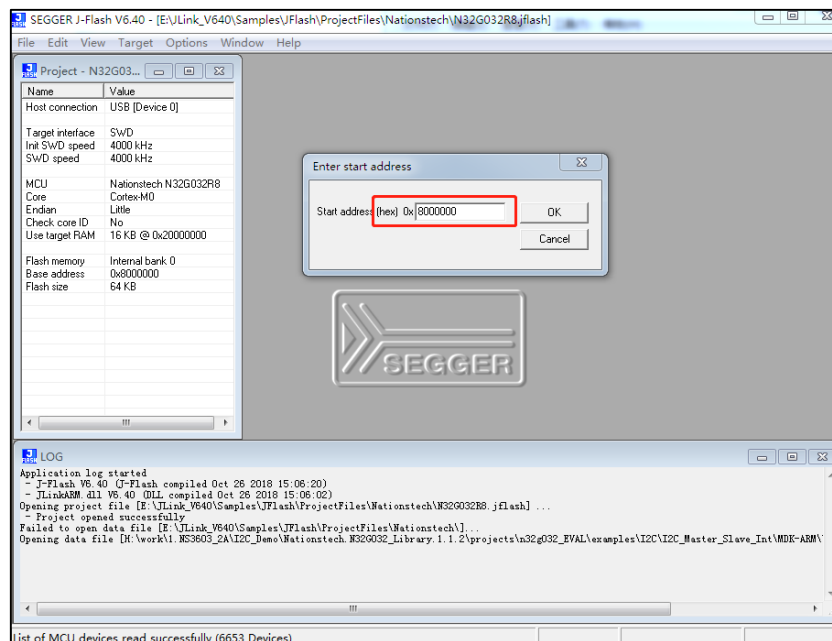

4) Open Target and click Production Programming (F7) to start programming. After programming, a successful prompt box will pop up, indicating that programming is successful


1)

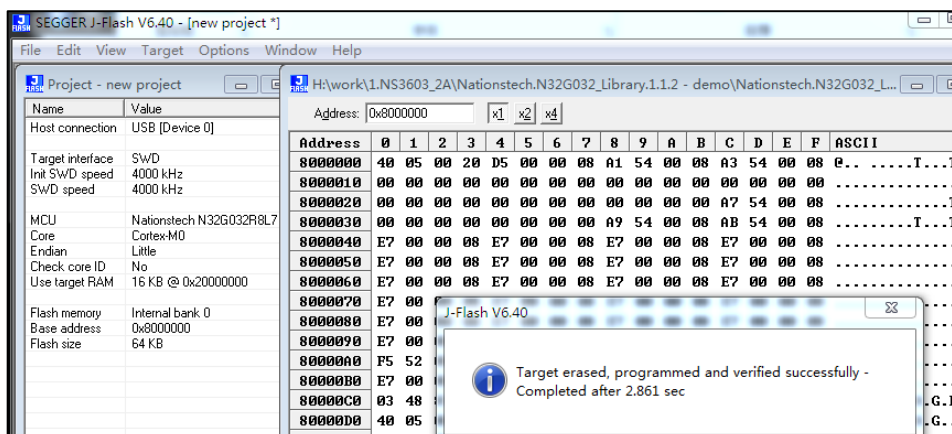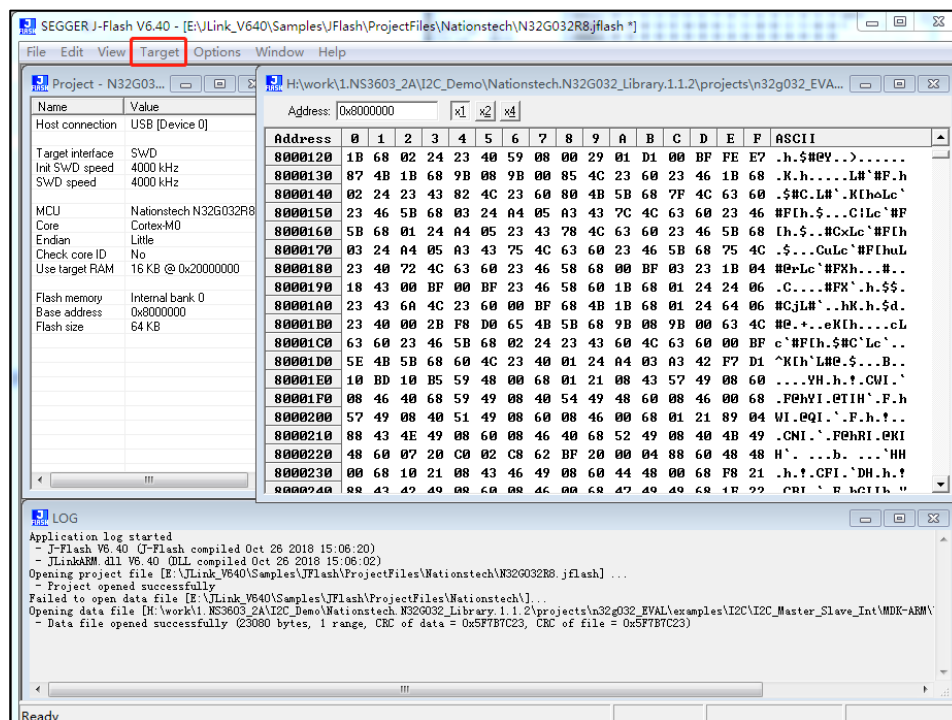


## 2.3 Unlock Nations chip read protection of L1 level

When Nations chip is enabled to read protection L1 level, you can use JLink tool and unlock application provided by Nations "JLinkNsUnlockTool Vx.x.x.exe" to unlock.

First open "JLinkNsUnlockTool Vx.x.x.exe":

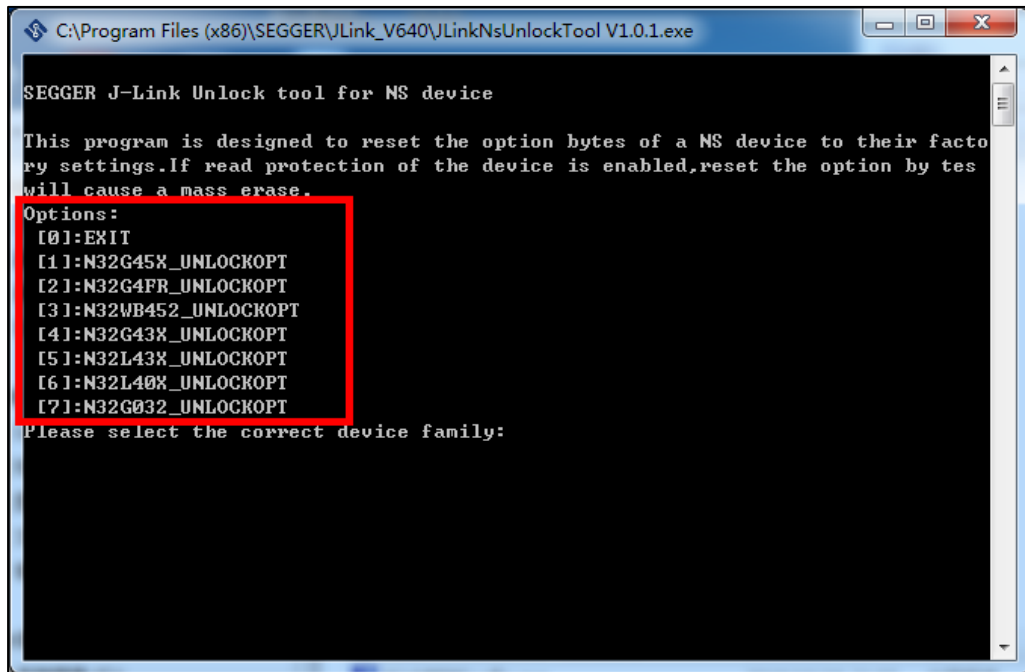

Enter the number of the Nations chip series to unlock. For example, to unlock the N32G45x series, enter 1 and press Enter:

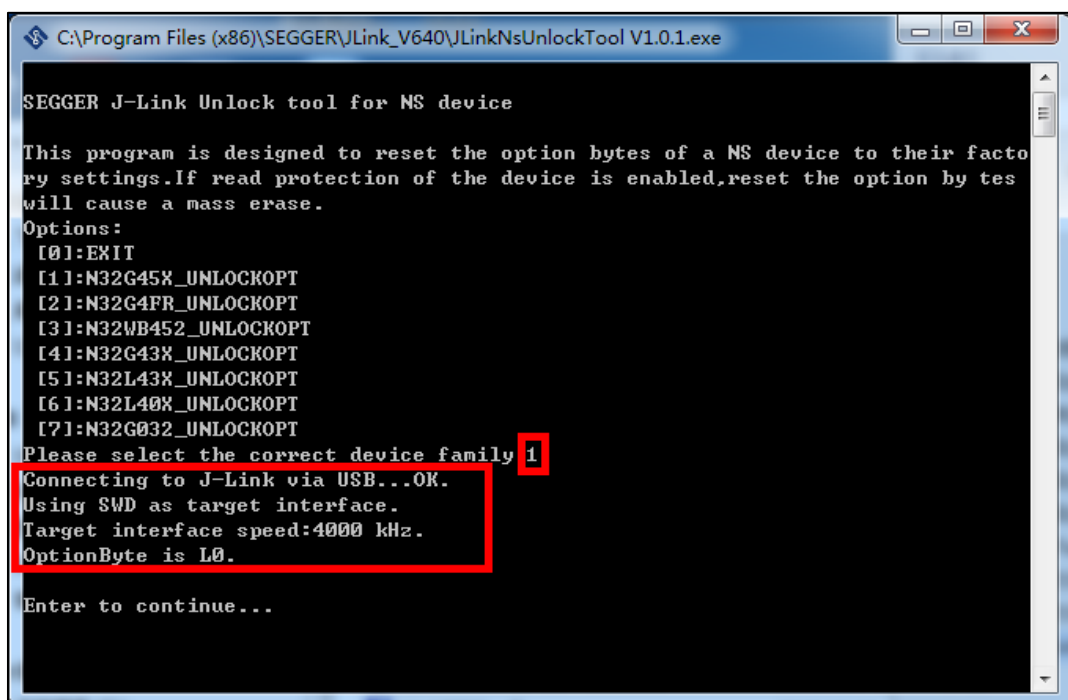

The application will automatically complete the connection unlock. After unlocking, press Enter, then type 0 and press Enter to exit.

### 3 Version history

Date	Version	Modify
2020.11.03	V0.1	The initial release
2020.12.04	V1.0	Add read protection to unlock
2022.05.17	V1.1	English version proofreading,document format adjustment



## 4 Legal Notice

This document is the exclusive property of Nations Technologies Inc. (Hereinafter referred to as NATIONS). This document, and the product of NATIONS described herein (Hereinafter referred to as the Product) are owned by NATIONS under the laws and treaties of the People's Republic of China and other applicable jurisdictions worldwide.

NATIONS does not grant any license under its patents, copyrights, trademarks, or other intellectual property rights. Names and brands of third party may be mentioned or referred thereto (if any) for identification purposes only.

NATIONS reserves the right to make changes, corrections, enhancements, modifications, and improvements to this document at any time without notice. Please contact NATIONS and obtain the latest version of this document before placing orders.

Although NATIONS has attempted to provide accurate and reliable information, NATIONS assumes no responsibility for the accuracy and reliability of this document.

It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. In no event shall NATIONS be liable for any direct, indirect, incidental, special, exemplary, or consequential damages arising in any way out of the use of this document or the Product.

NATIONS Products are neither intended nor warranted for usage in systems or equipment, any malfunction or failure of which may cause loss of human life, bodily injury or severe property damage. Such applications are deemed, "Insecure Usage".

Insecure usage includes, but is not limited to: equipment for surgical implementation, atomic energy control instruments, airplane or spaceship instruments, all types of safety devices, and other applications intended to support or sustain life.

All Insecure Usage shall be made at user's risk. User shall indemnify NATIONS and hold NATIONS harmless from and against all claims, costs, damages, and other liabilities, arising from or related to any customer's Insecure Usage.

Any express or implied warranty with regard to this document or the Product, including, but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement are disclaimed to the fullest extent permitted by law.

Unless otherwise explicitly permitted by NATIONS, anyone may not use, duplicate, modify, transcribe or otherwise distribute this document for any purposes, in whole or in part.